

MSBCCL132SA-2 5,5KW 400/690V B3

Three-phase asynchronous brake motor in aluminum

Motor type MSBCCL132SA-2 5,5KW 400/690V B3
 Brand BUSCK
 Item number B3021321

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	5,5	50	10,53	2900
690	5,5	50	6,05	2900
460	6,33	60	10,53	3480


Duty S1
 Enclosure IP55
 Insulation class F
 Cooling IC411 (TEFC)
 Max. ambient temp. 40°C
 Min. ambient temp. -20°C
 Max. temp. rise 80 K
 Max altitude, masl 1000

Torque, Nm 18,11
 Starting torque ratio 2
 Pull up torque ratio 1,2
 Pull out torque ratio 2,2
 Starting current ratio 7,5

Efficiency class EFF2
 Efficiency, load 100% 85,7
 Power fact, load 100% 0,88

Painting Standard
 Color RAL 9005
 Weight kg 42
 Sound pressure Lp dB(A) 80
 Bearing DE 6308-2Z/C3
 Bearing NDE 6208-2Z/C3
 Balance grade Normal
 Inertia kgm² 0,0119
 Cable entries 2xM25

Brake torque, Nm 80

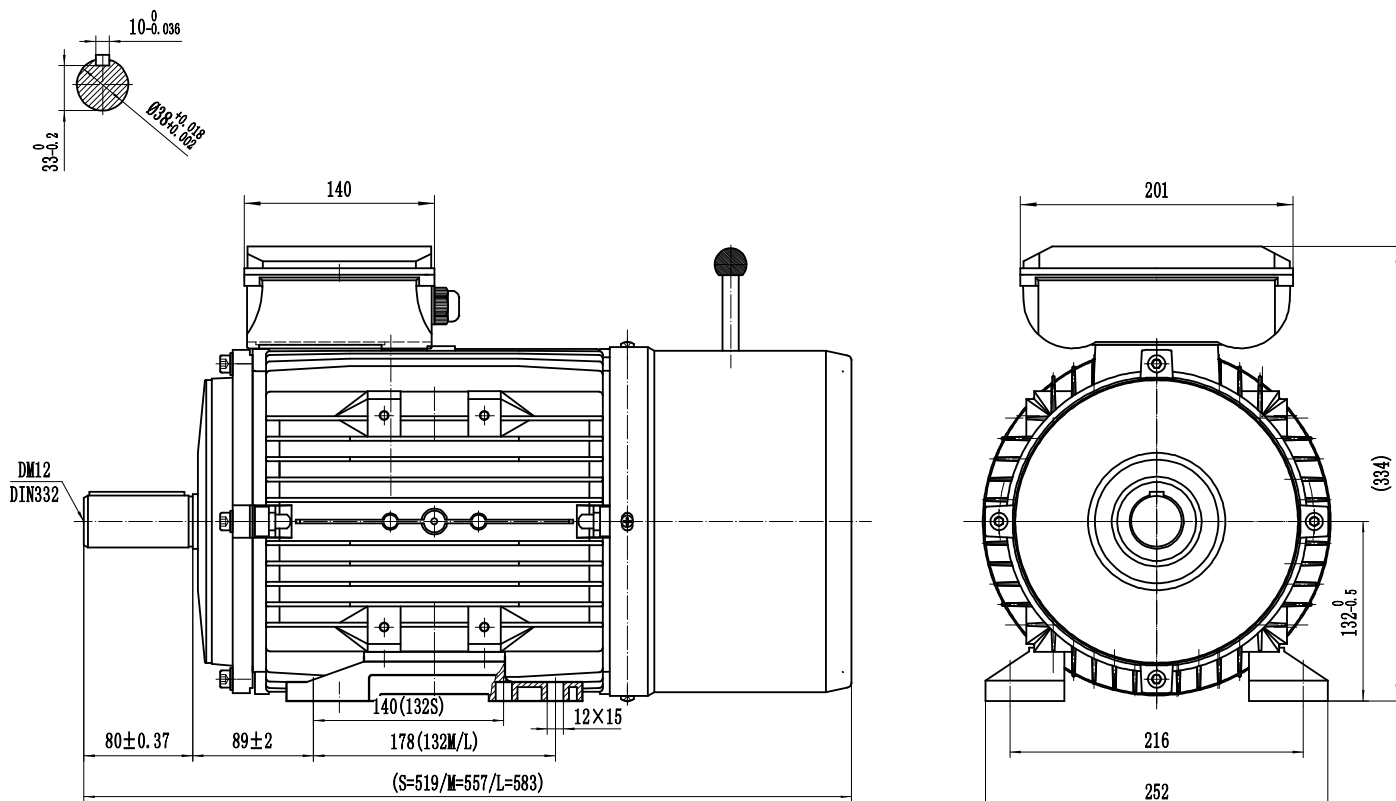

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no