

# MSBCCL132SB-2 7,5KW 400/690V B14

## Three-phase asynchronous brake motor in aluminum

Motor type MSBCCL132SB-2 7,5KW 400/690V B14  
Brand BUSCK  
Item number B3021333

| Voltage V | Power kW | Frequency Hz | Current A | Speed rpm |
|-----------|----------|--------------|-----------|-----------|
| 400       | 7,5      | 50           | 14,14     | 2920      |
| 690       | 7,5      | 50           | 8,13      | 2920      |
| 460       | 8,63     | 60           | 14,14     | 3504      |



Duty S1  
Enclosure IP55  
Insulation class F  
Cooling IC411 (TEFC)  
Max. ambient temp. 40°C  
Min. ambient temp. -20°C  
Max. temp. rise 80 K  
Max altitude, masl 1000

Torque, Nm 24,53  
Starting torque ratio 2  
Pull up torque ratio 1,2  
Pull out torque ratio 2,2  
Starting current ratio 7,5

Efficiency class EFF2  
Efficiency, load 100% 87  
Power fact, load 100% 0,88

Painting Standard  
Color RAL 9005  
Weight kg 51  
Sound pressure Lp dB(A) 80  
Bearing DE 6308-2Z/C3  
Bearing NDE 6208-2Z/C3  
Balance grade Normal  
Inertia kgm<sup>2</sup> 0,0133  
Cable entries 2xM25

Brake torque, Nm 80

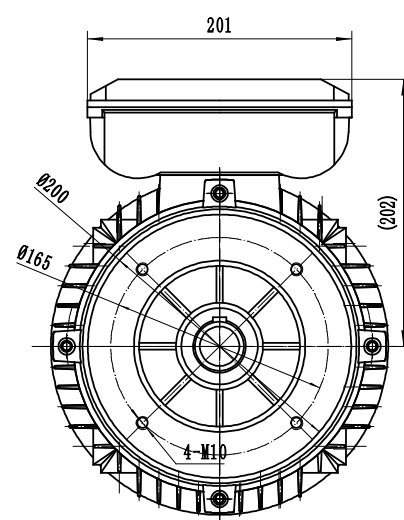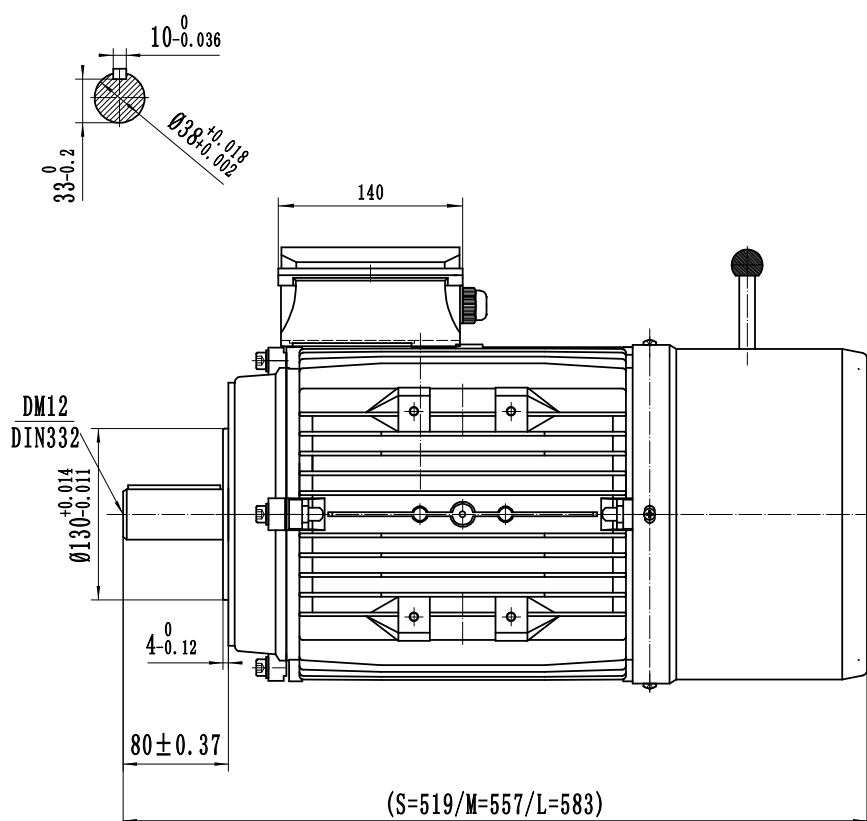

**BUSCK**  
www.busck.eu

Busck & Co AB  
Gamla Riksvägen 14  
428 32 Göteborg  
Sweden  
556027-1990  
info@busck.se

Busck & Co ApS  
Postboks 108  
0900 København C  
Denmark  
info@busck.eu

Busck AS  
Skibåsen 35C  
4636 Kristiansand  
Norway  
info@busck.no