




MSBCCL56B-4 0,09KW 230/400V B14

Three-phase asynchronous brake motor in aluminum

Motor type MSBCCL56B-4 0,09KW 230/400V B14
Brand BUSCK
Item number B3040573

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,09	50	0,78	1360
400	0,09	50	0,45	1360
460	0,10	60	0,45	1632

Duty	S1	Efficiency, load 100%	52
Enclosure	IP55	Efficiency, load 75%	48,7
Insulation class	F	Efficiency, load 50%	41
Cooling	IC411 (TEFC)	Power fact, load 100%	0,59
Max. ambient temp.	40°C	Painting	Standard
Min. ambient temp.	-20°C	Color	RAL 9005
Max. temp. rise	80 K	Weight kg	5
Max altitude, masl	1000	Sound pressure Lp dB(A)	50
Torque, Nm	0,63	Bearing DE	6201-2Z/C3
Starting torque ratio	2,3	Bearing NDE	6201-2Z/C3
Pull up torque ratio	2	Balance grade	Normal
Pull out torque ratio	2,4	Inertia kgm ²	0,00024
Starting current ratio	4	Cable entries	1xM16
		Brake torque, Nm	4

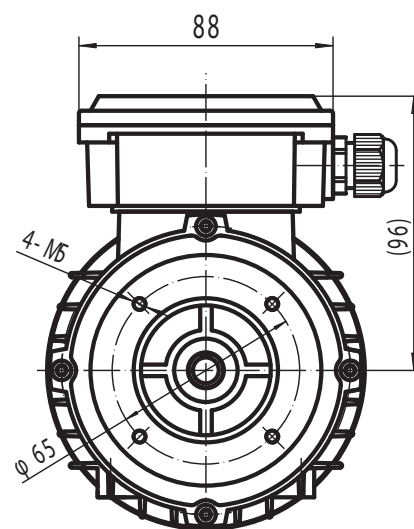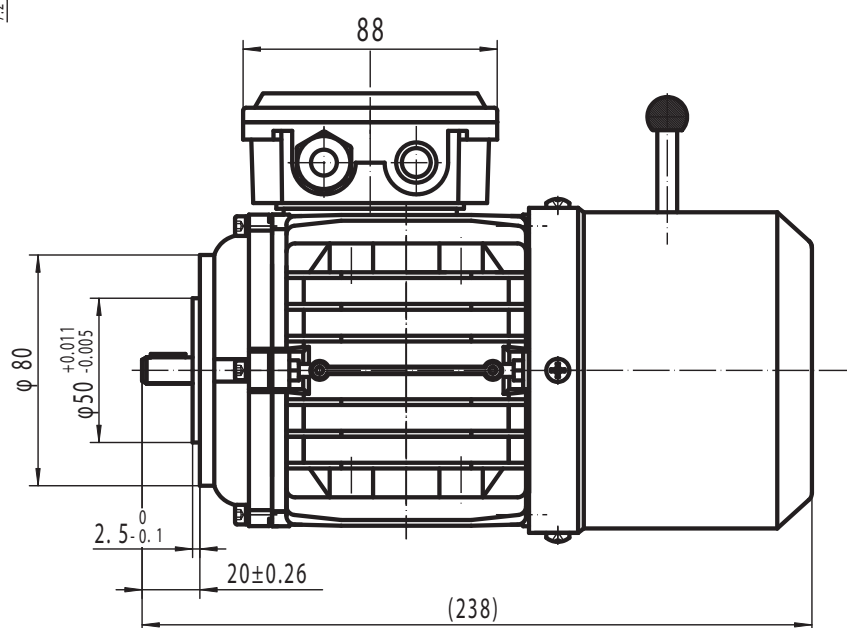

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no