


T2AB71A-4 0,25KW 230/400V B5

Three-phase asynchronous brake motor in aluminum

Motor type T2AB71A-4 0,25KW 230/400V B5
Brand BUSCK
Item number B3040712e

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,25	50	1,34	1400
400	0,25	50	0,77	1400
460	0,29	60	0,77	1680

Duty	S1	Efficiency class	IE2
Enclosure	IP55	Efficiency, load 100%	69,6
Insulation class	F	Efficiency, load 75%	68,5
Cooling	IC411 (TEFC)	Efficiency, load 50%	62,9
Max. ambient temp.	40°C	Power fact, load 100%	0,67
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	6,33
Starting torque ratio	2,2	Sound pressure Lp dB(A)	55
Pull up torque ratio	1,8	Bearing DE	6202 2RZ C3
Pull out torque ratio	2,3	Bearing NDE	6202 2RZ C3
Starting current ratio	4,1	Balance grade	Normal
		Inertia kgm2	0,000593
Note	Brake motor IE2	Brake torque, Nm	4

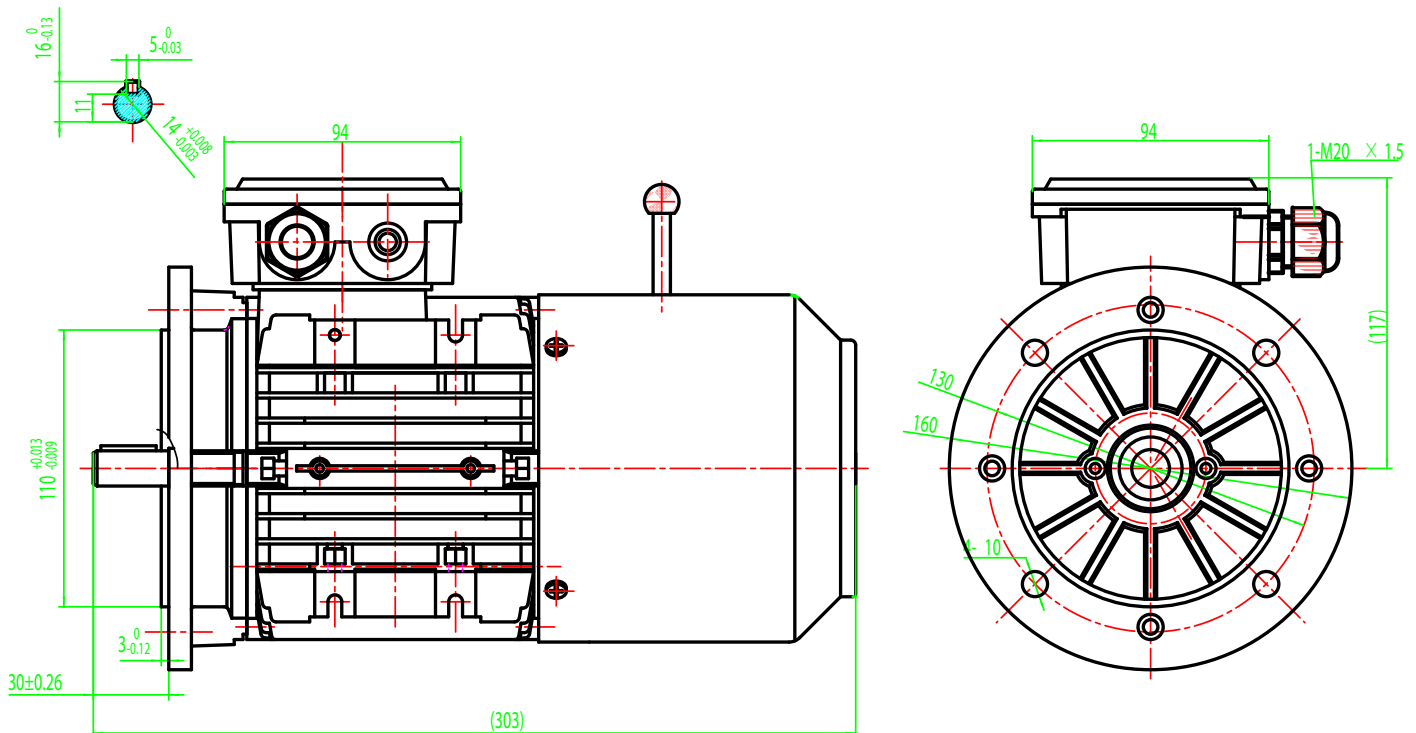

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no