

MSBCCL100L-6 1,5KW 230/400V B14


Three-phase asynchronous brake motor in aluminum

Motor type MSBCCL100L-6 1,5KW 230/400V B14
 Brand BUSCK
 Item number B3061003

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	1,5	50	6,7	945
400	1,5	50	3,85	945
460	1,73	60	3,85	1134

Duty	S1	Efficiency class	EFF2
Enclosure	IP55	Efficiency, load 100%	72
Insulation class	F	Power fact, load 100%	0,74
Cooling	IC411 (TEFC)	Painting	Standard
Max. ambient temp.	40°C	Color	RAL 9005
Min. ambient temp.	-20°C	Weight kg	23
Max. temp. rise	80 K	Sound pressure Lp dB(A)	61
Max altitude, masl	1000	Bearing DE	6206-2Z/C3
Torque, Nm	15	Bearing NDE	6206-2Z/C3
Starting torque ratio	2,1	Balance grade	Normal
Pull up torque ratio	2,1	Cable entries	1xM20
Pull out torque ratio	2,6		

Note Fast half wave rectifier. DC brake 103 V

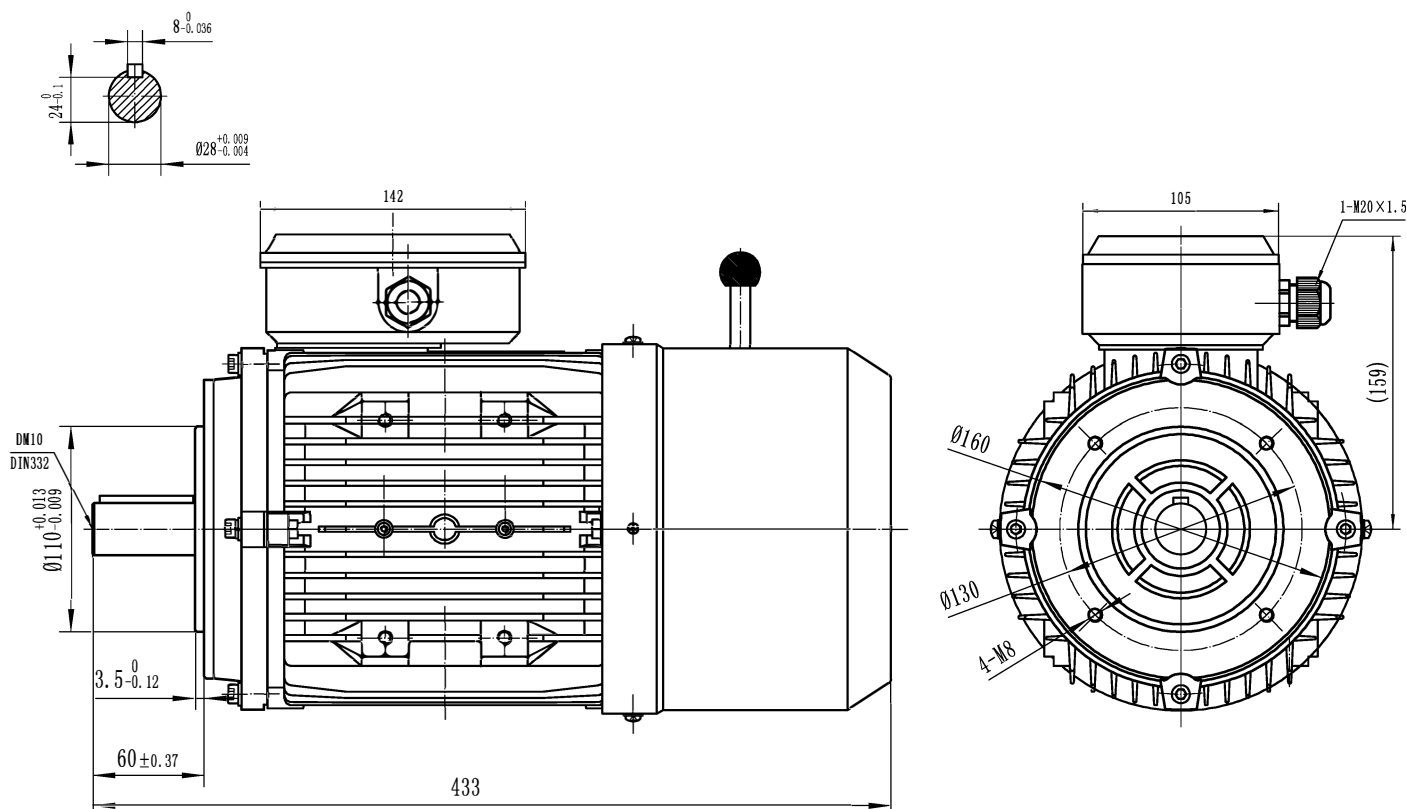

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no