


MSBCCL112M-6 2,2KW 230/400V B35

Three-phase asynchronous brake motor in aluminum

Motor type MSBCCL112M-6 2,2KW 230/400V B35
Brand BUSCK
Item number B3061124

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	2,2	50	8,89	925
400	2,2	50	5,11	925
460	2,53	60	5,11	1110

Duty	S1	Efficiency class	EFF2
Enclosure	IP55	Power fact, load 100%	0,78
Insulation class	F	Painting	Standard
Cooling	IC411 (TEFC)	Color	RAL 9005
Max. ambient temp.	40°C	Weight kg	0
Min. ambient temp.	-20°C	Sound pressure Lp dB(A)	64
Max. temp. rise	80 K	Bearing DE	6306-2Z/C3
Max altitude, masl	1000	Bearing NDE	6206-2Z/C3
Torque, Nm	22	Balance grade	Normal
Starting torque ratio	2,2	Cable entries	2xM25
Pull up torque ratio	1,8	Brake torque, Nm	60
Pull out torque ratio	2,6		

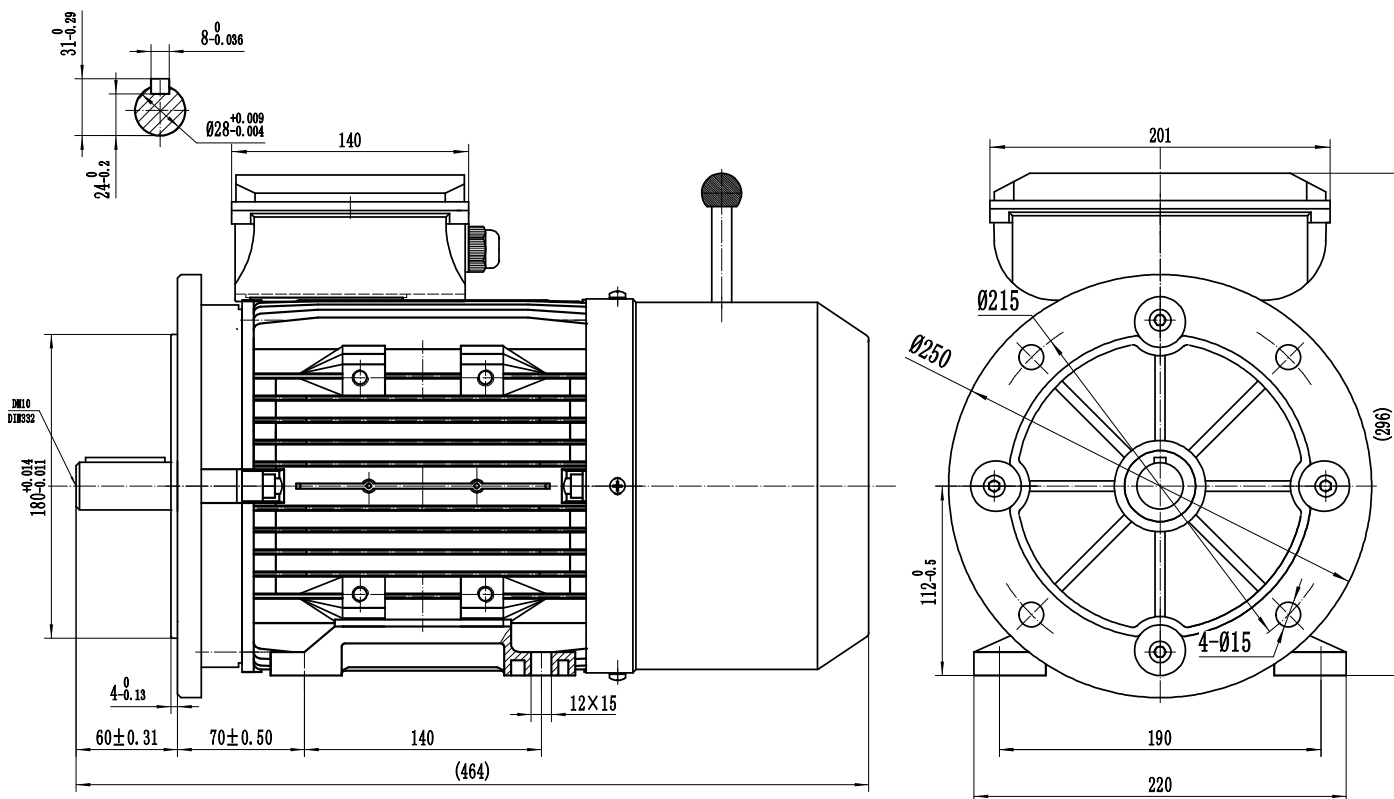

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no