


MSBCCL112M-6 2,2KW 230/400V B34

Three-phase asynchronous brake motor in aluminum

Motor type MSBCCL112M-6 2,2KW 230/400V B34
 Brand BUSCK
 Item number B3061125

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	2,2	50	8,89	925
400	2,2	50	5,11	925
460	2,53	60	5,11	1110

Duty	S1	Efficiency class	EFF2
Enclosure	IP55	Power fact, load 100%	0,78
Insulation class	F	Painting	Standard
Cooling	IC411 (TEFC)	Color	RAL 9005
Max. ambient temp.	40°C	Weight kg	0
Min. ambient temp.	-20°C	Sound pressure Lp dB(A)	64
Max. temp. rise	80 K	Bearing DE	6306-2Z/C3
Max altitude, masl	1000	Bearing NDE	6206-2Z/C3
		Balance grade	Normal
Torque, Nm	22	Cable entries	2xM25
Starting torque ratio	2,2		
Pull up torque ratio	1,8	Brake torque, Nm	60
Pull out torque ratio	2,6		

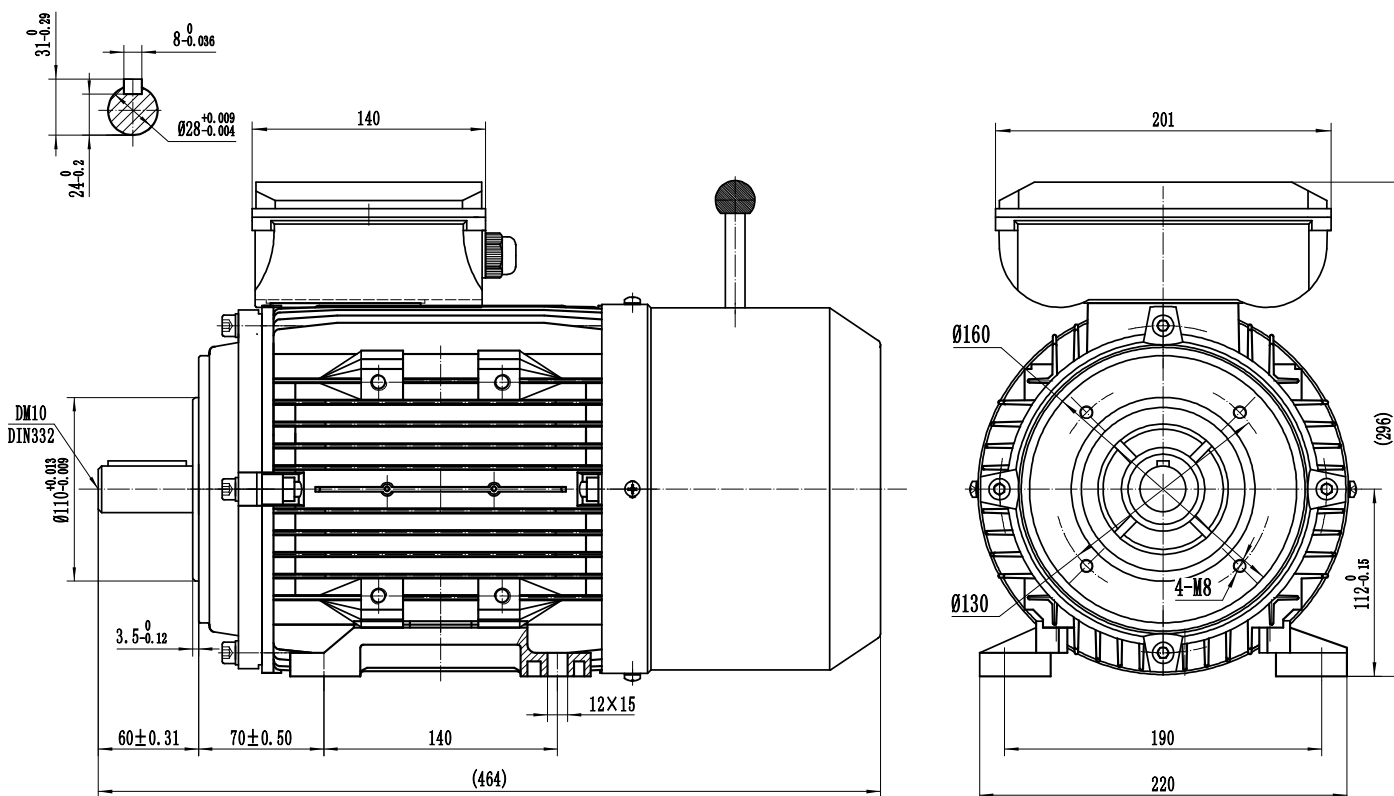

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no