

MSBCCL132S-6 3KW 230/400V B3

Three-phase asynchronous brake motor in aluminum

Motor type MSBCCL132S-6 3KW 230/400V B3
Brand BUSCK
Item number B3061321

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	3	50	12,54	960
400	3	50	7,21	960
460	3,45	60	7,21	1152


Duty S1
Enclosure IP55
Insulation class F
Cooling IC411 (TEFC)
Max. ambient temp. 40°C
Min. ambient temp. -20°C
Max. temp. rise 80 K
Max altitude, masl 1000

Torque, Nm 32
Starting torque ratio 2
Pull up torque ratio 1,7
Pull out torque ratio 2,7
Starting current ratio 5,9

Efficiency class EFF2
Efficiency, load 100% 79
Power fact, load 100% 0,74

Painting Standard
Color RAL 9005
Weight kg 0
Sound pressure Lp dB(A) 664
Bearing DE 6308-2Z/C3
Bearing NDE 6208-2Z/C3
Balance grade Normal
Cable entries 2xM25

Brake torque, Nm 90

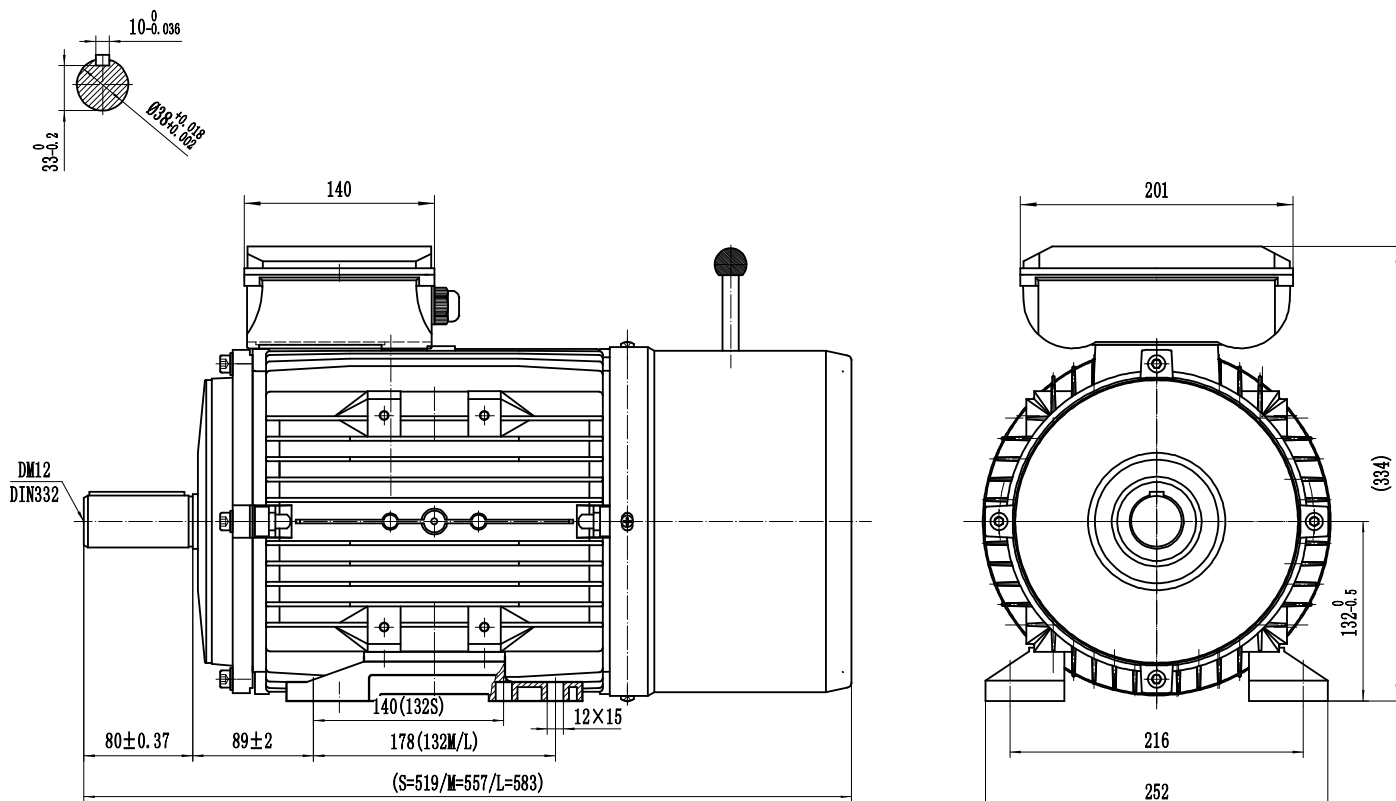

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no