


MSBCCL90L-8 0,55KW 230/400V B34

Three-phase asynchronous brake motor in aluminum

Motor type MSBCCL90L-8 0,55KW 230/400V B34
 Brand BUSCK
 Item number B3080915

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,55	50	3,22	680
400	0,55	50	1,85	680
460	0,63	60	1,85	816

Duty	S1	Efficiency class	EFF2
Enclosure	IP55	Efficiency, load 100%	66
Insulation class	F	Painting	Standard
Cooling	IC411 (TEFC)	Color	RAL 9005
Max. ambient temp.	40°C	Weight kg	0
Min. ambient temp.	-20°C	Sound pressure Lp dB(A)	56
Max. temp. rise	80 K	Bearing DE	6205-2Z/C3
Max altitude, masl	1000	Bearing NDE	6205-2Z/C3
Starting torque ratio	1,6	Balance grade	Normal
Pull up torque ratio	1,3	Cable entries	1xM20
Pull out torque ratio	1,8	Brake torque, Nm	116

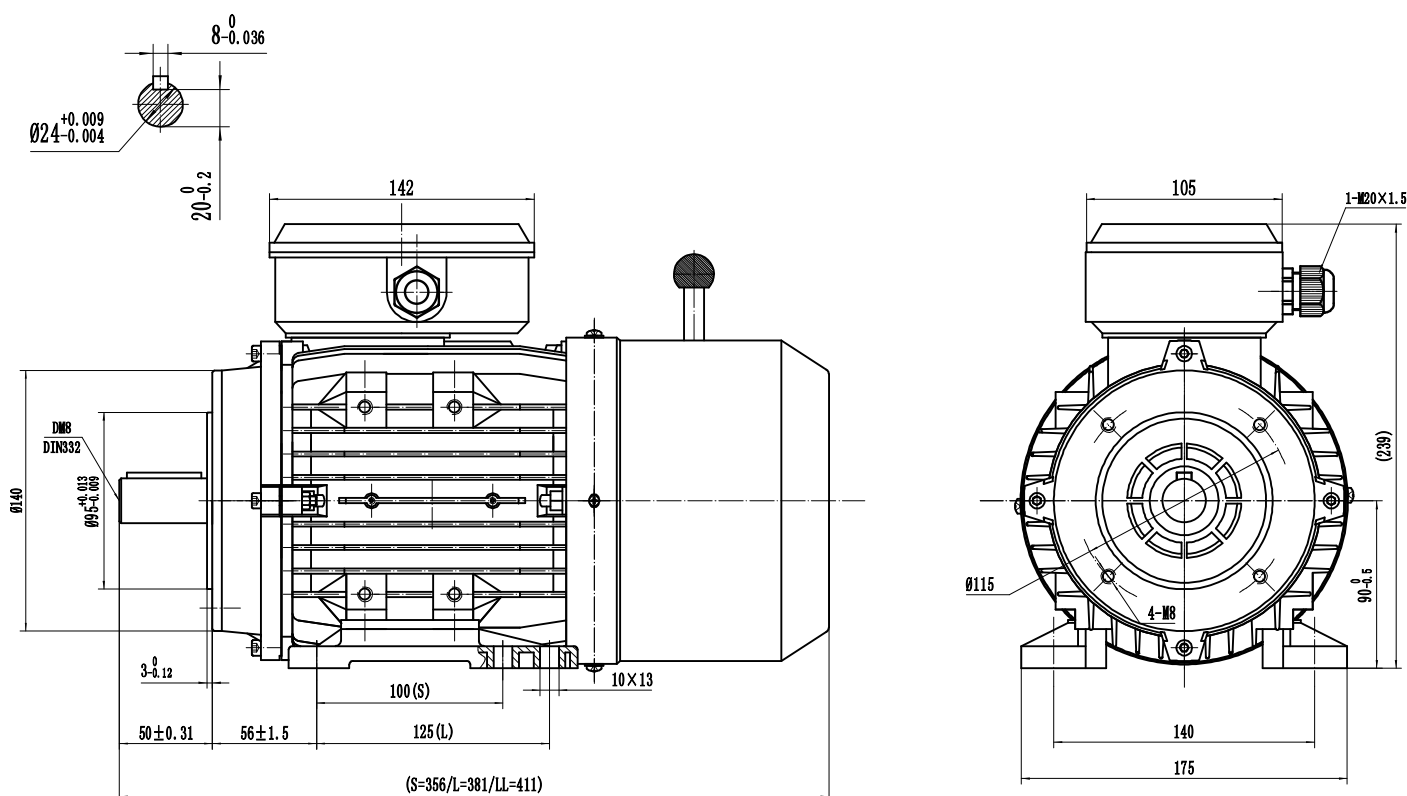

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no