

MSBCCL100LA-8 0,75KW 230/400V B14

Three-phase asynchronous brake motor in aluminum

Motor type MSBCCL100LA-8 0,75KW 230/400V B14
 Brand BUSCK
 Item number B3081003

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,75	50	4,26	710
400	0,75	50	2,45	710
460	0,86	60	2,45	852


Duty S1
 Enclosure IP55
 Insulation class F
 Cooling IC411 (TEFC)
 Max. ambient temp. 40°C
 Min. ambient temp. -20°C
 Max. temp. rise 80 K
 Max altitude, masl 1000

Starting torque ratio 1,7
 Pull up torque ratio 1,3
 Pull out torque ratio 2,1

Efficiency class EFF2
 Efficiency, load 100% 66

Painting Standard
 Color RAL 9005
 Weight kg 0
 Sound pressure Lp dB(A) 59
 Bearing DE 6206-2Z/C3
 Bearing NDE 6206-2Z/C3
 Balance grade Normal
 Cable entries 1xM20

Brake torque, Nm 32

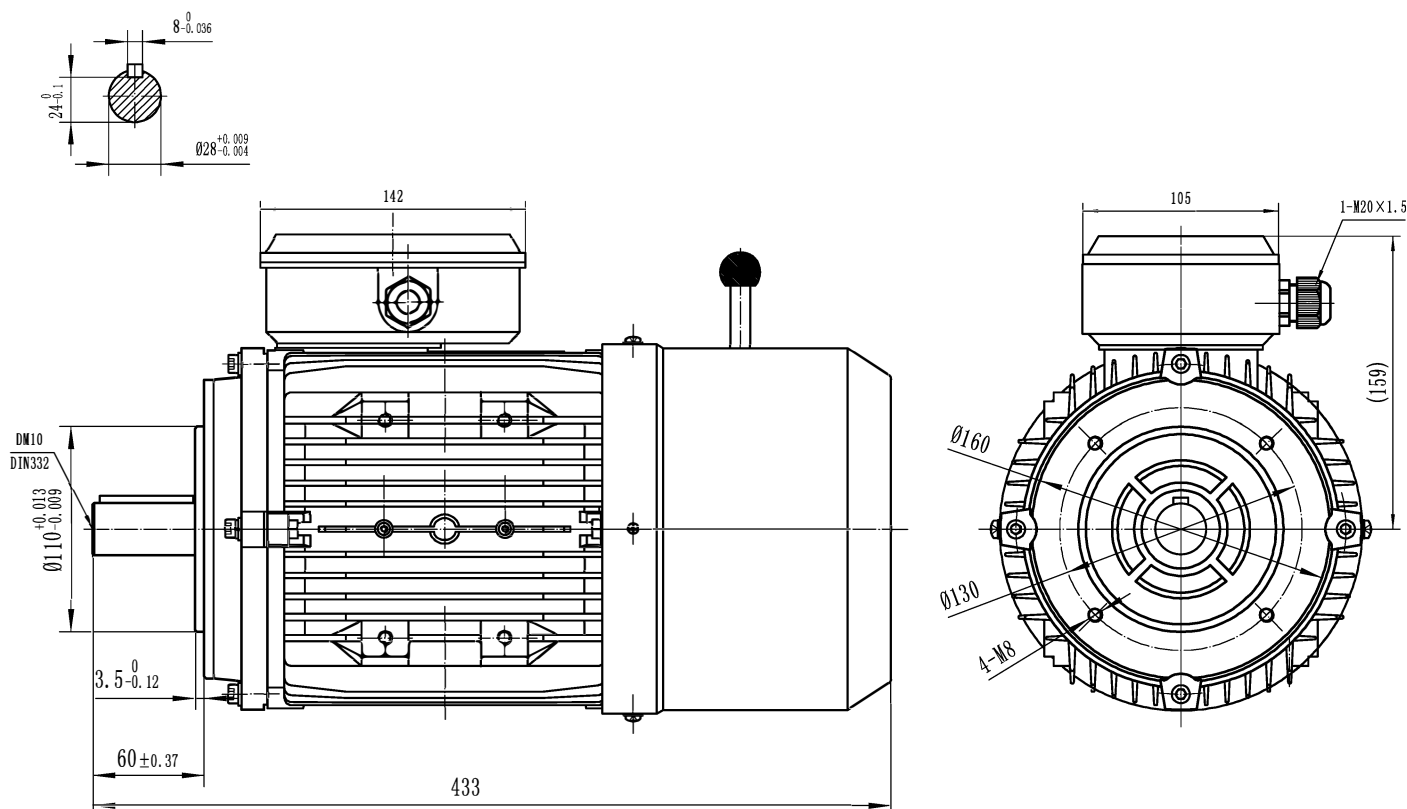

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no