


MSBCCL132S-8 2,2KW 230/400V B14

Three-phase asynchronous brake motor in aluminum

Motor type MSBCCL132S-8 2,2KW 230/400V B14
Brand BUSCK
Item number B3081323

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	2,2	50	10,37	720
400	2,2	50	5,96	720
460	2,53	60	5,96	864

Duty	S1	Efficiency class	EFF2
Enclosure	IP55	Efficiency, load 100%	75
Insulation class	F		
Cooling	IC411 (TEFC)	Painting	Standard
Max. ambient temp.	40°C	Color	RAL 9005
Min. ambient temp.	-20°C	Weight kg	0
Max. temp. rise	80 K	Sound pressure Lp dB(A)	64
Max altitude, masl	1000	Bearing DE	6308-2Z/C3
		Bearing NDE	6208-2Z/C3
Starting torque ratio	2	Balance grade	Normal
Pull up torque ratio	1,2	Cable entries	2xM25
Pull out torque ratio	2		

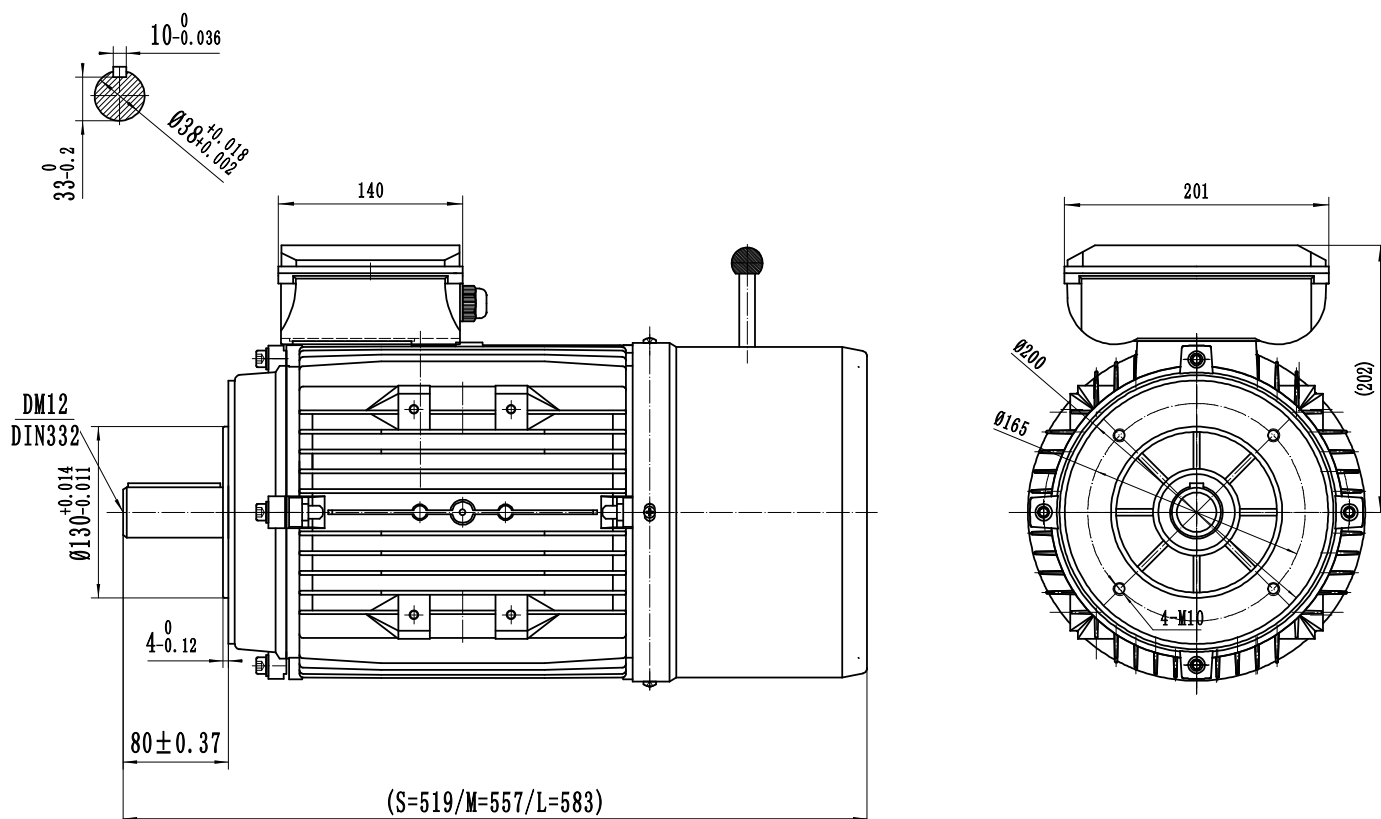

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no