

SEP KYLFLÄKT G-80B 230/400V 50HZ



Three-phase asynchronous motor in aluminum

Motor type SEP KYLFLÄKT G-80B 230/400V 50HZ
Brand BUSCK
Item number F3080

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,03	50	0,16	2800
400	0,03	50	0,09	2800
460	0,04	60	0,09	3360

Duty	S1	Painting	Standard
Enclosure	IP55	Color	RAL 9005
Insulation class	F	Weight kg	3
Cooling	IC411 (TEFC)	Sound pressure Lp dB(A)	62
Max. ambient temp.	40°C	Balance grade	Normal
Min. ambient temp.	-20°C		
Max. temp. rise	80 K		
Max altitude, masl	1000		

Note Förlänger MS/ME med 100mm

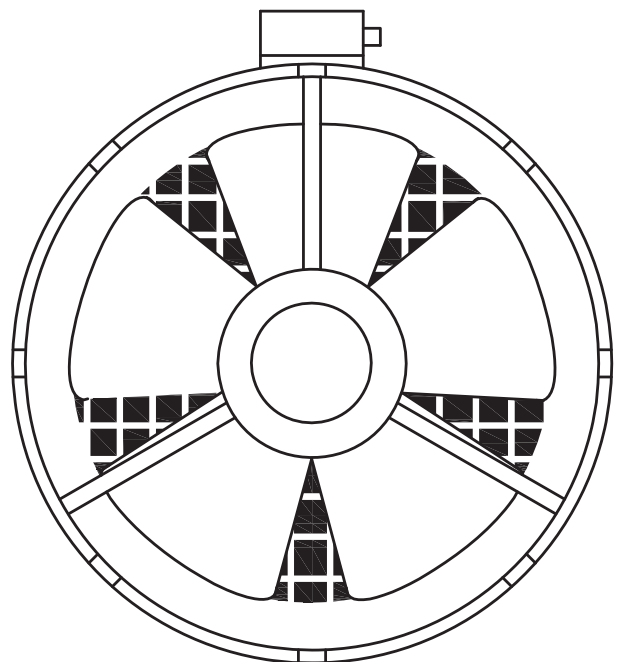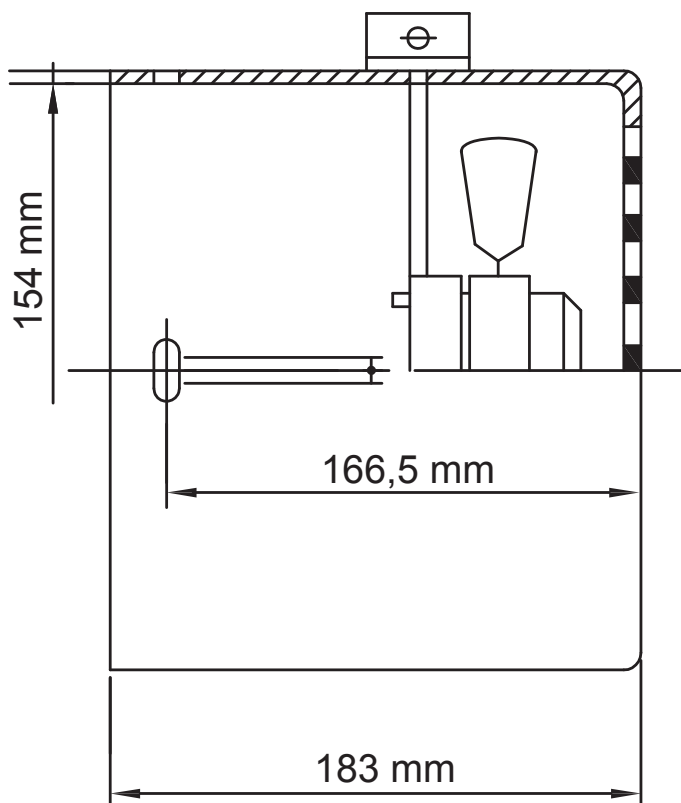

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no