

SEP KYLFLÄKT G-132B TA132 230/400V 50HZ



Three-phase asynchronous motor in aluminum

Motor type SEP KYLFLÄKT G-132B TA132 230/400V 50HZ
Brand BUSCK
Item number F3132TA

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,05	50	0,34	1450
400	0,05	50	0,20	1450
460	0,06	60	0,20	1740

Duty S1
Enclosure IP55
Insulation class F
Cooling IC411 (TEFC)
Max. ambient temp. 40°C
Min. ambient temp. -20°C
Max. temp. rise 80 K
Max altitude, masl 1000

Painting Standard
Color RAL 9005
Weight kg 5,5
Sound pressure Lp dB(A) 69
Balance grade Normal

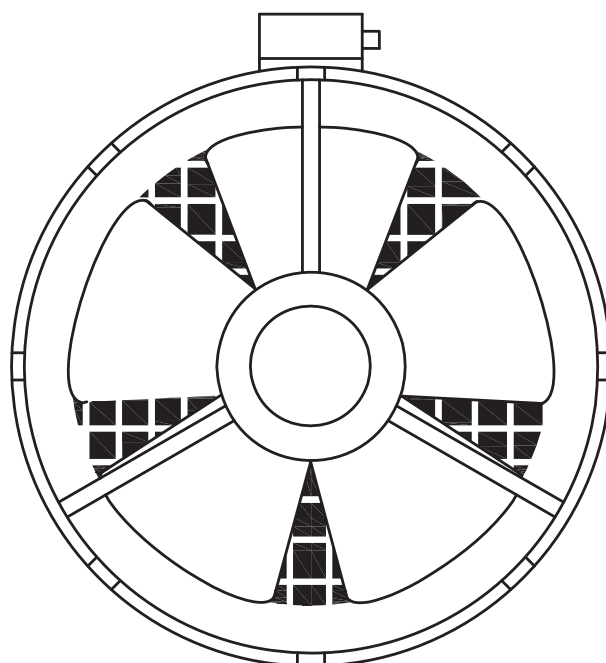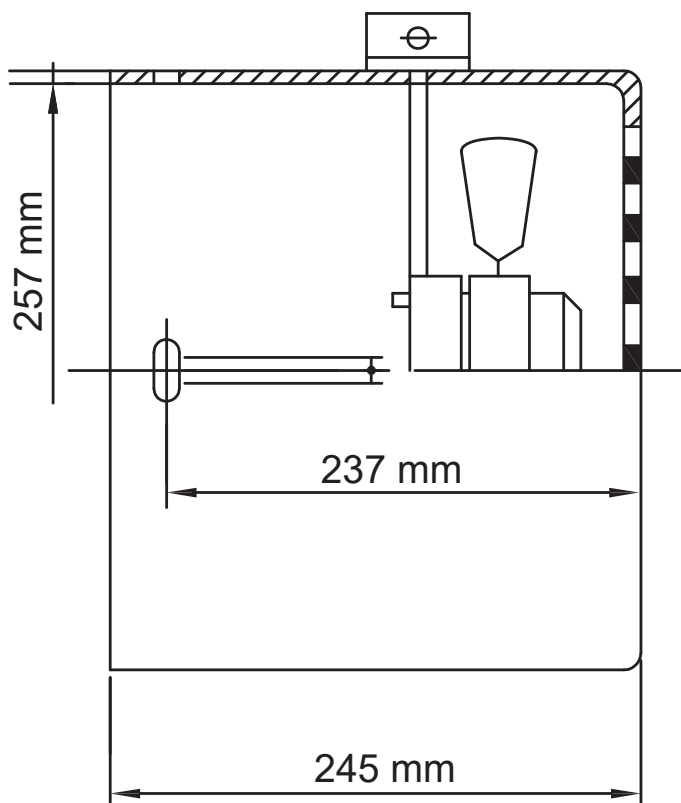

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no