

SEP KYLFLÄKT G-160B 230/400V 50HZ



Three-phase asynchronous motor in aluminum

Motor type SEP KYLFLÄKT G-160B 230/400V 50HZ
Brand BUSCK
Item number F3160

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,06	50	0,35	1400
400	0,06	50	0,20	1400
460	0,07	60	0,20	1680

Duty	S1	Painting	Standard
Enclosure	IP55	Color	RAL 9005
Insulation class	F	Weight kg	6,5
Cooling	IC411 (TEFC)	Sound pressure Lp dB(A)	72
Max. ambient temp.	40°C	Balance grade	Normal
Min. ambient temp.	-20°C		
Max. temp. rise	80 K		
Max altitude, masl	1000		

Note Förlänger MS/ME med 106mm

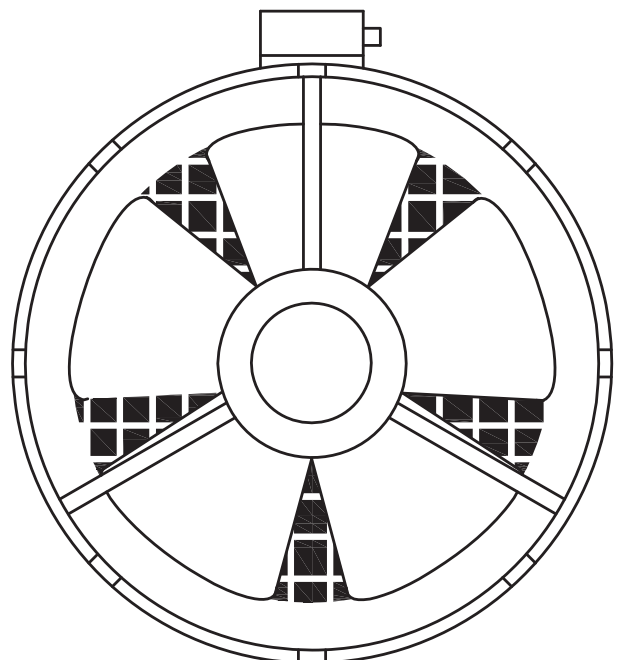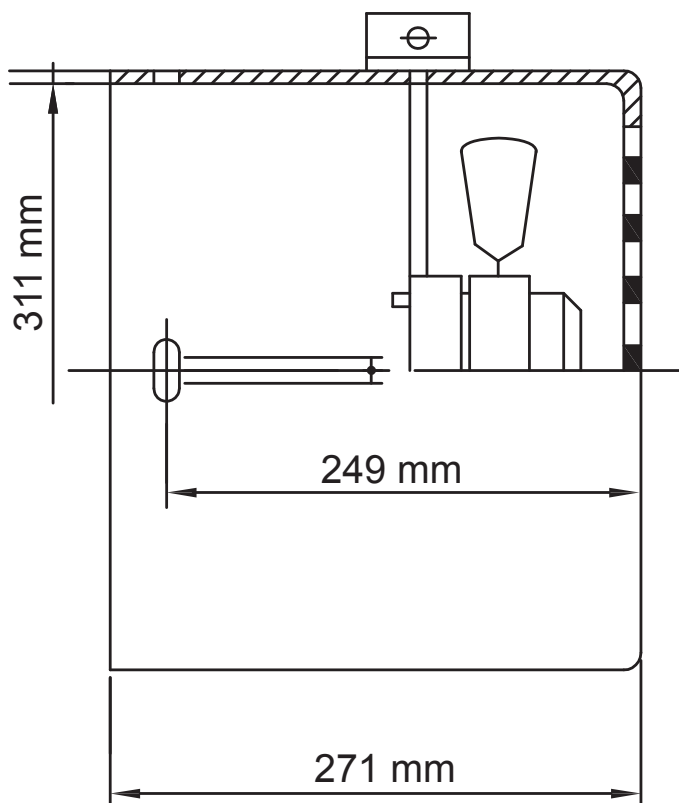

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no