


MS71C-2 0,75KW 230/400V B5

Three-phase asynchronous motor in aluminum

Motor type MS71C-2 0,75KW 230/400V B5
Brand BUSCK
Item number P3020712X

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,75	50	3,11	2820
400	0,75	50	1,79	2820
460	0,86	60	1,79	3384

Duty	S1	Efficiency, load 100%	73,8
Enclosure	IP55	Efficiency, load 75%	73,9
Insulation class	F	Efficiency, load 50%	70,3
Cooling	IC411 (TEFC)	Power fact, load 100%	0,82
Max. ambient temp.	40°C	Painting	Standard
Min. ambient temp.	-20°C	Color	RAL 9005
Max. temp. rise	80 K	Weight kg	7
Max altitude, masl	1000	Sound pressure Lp dB(A)	65
Torque, Nm	2,54	Balance grade	Normal
Starting torque ratio	3	Inertia kgm2	0,00048
Pull up torque ratio	2		
Pull out torque ratio	3		
Starting current ratio	6,6		

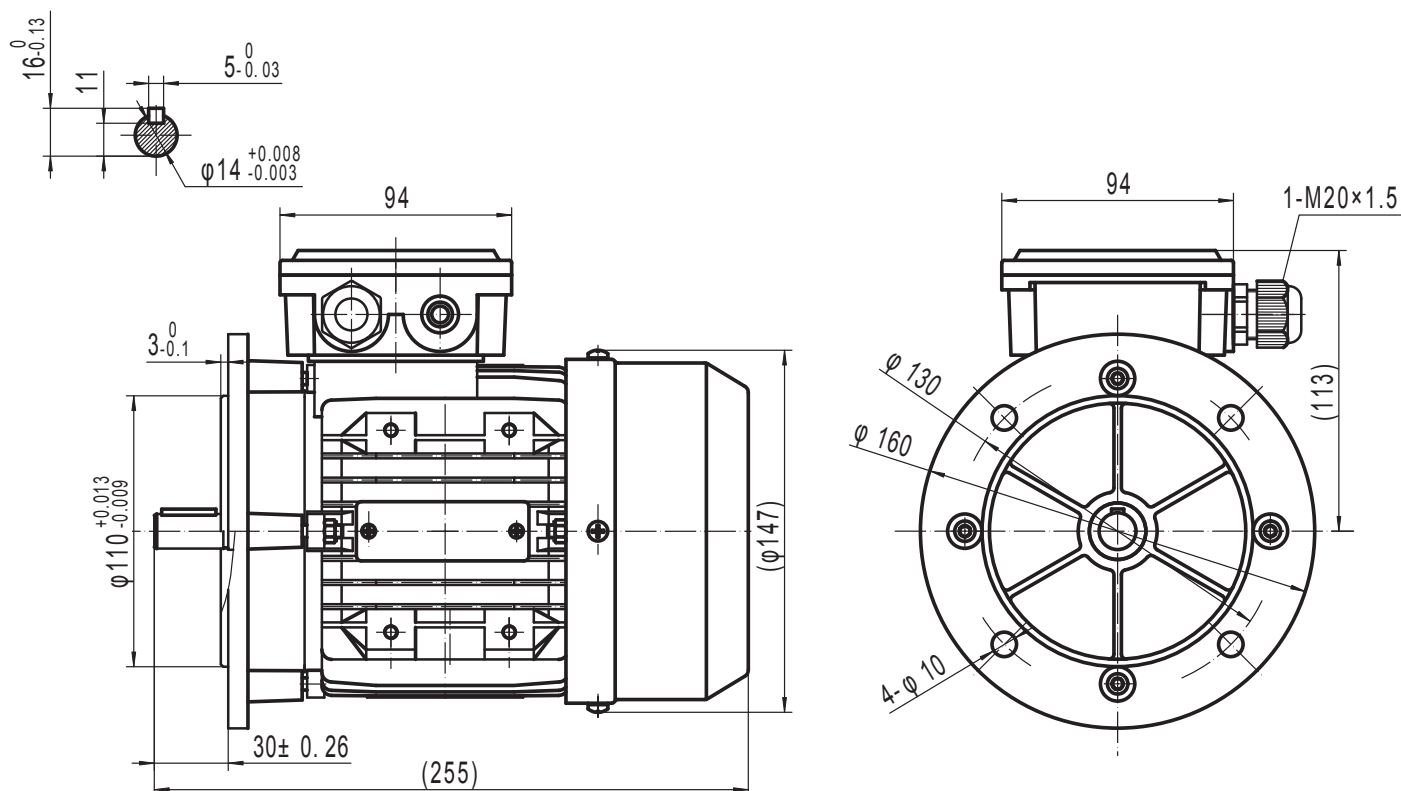

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no