

T2A90LB-2 3KW 230/400V B3

Three-phase asynchronous motor in aluminum

Motor type T2A90LB-2 3KW 230/400V B3
Brand BUSCK
Item number P3020901e

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	3	50	10,47	2890
400	3	50	6,02	2890
460	3,45	60	6,02	3468


Duty S1
Enclosure IP55
Insulation class F
Cooling IC411 (TEFC)
Max. ambient temp. 40°C
Min. ambient temp. -20°C
Max. temp. rise 80 K
Max altitude, masl 1000

Torque, Nm 9,95
Starting torque ratio 3,4
Pull up torque ratio 2,3
Pull out torque ratio 3,3
Starting current ratio 7,9

Note IE2

Efficiency, load 100% 84,6
Efficiency, load 75% 85,8
Efficiency, load 50% 85,2
Power fact, load 100% 0,85

Painting Standard
Color RAL 9005
Weight kg 17,2
Sound pressure Lp dB(A) 74
Bearing DE 6205-2Z/C3
Bearing NDE 6205-2Z/C3
Balance grade Normal
Inertia kgm² 0,002965955
Cable entries 1xM20

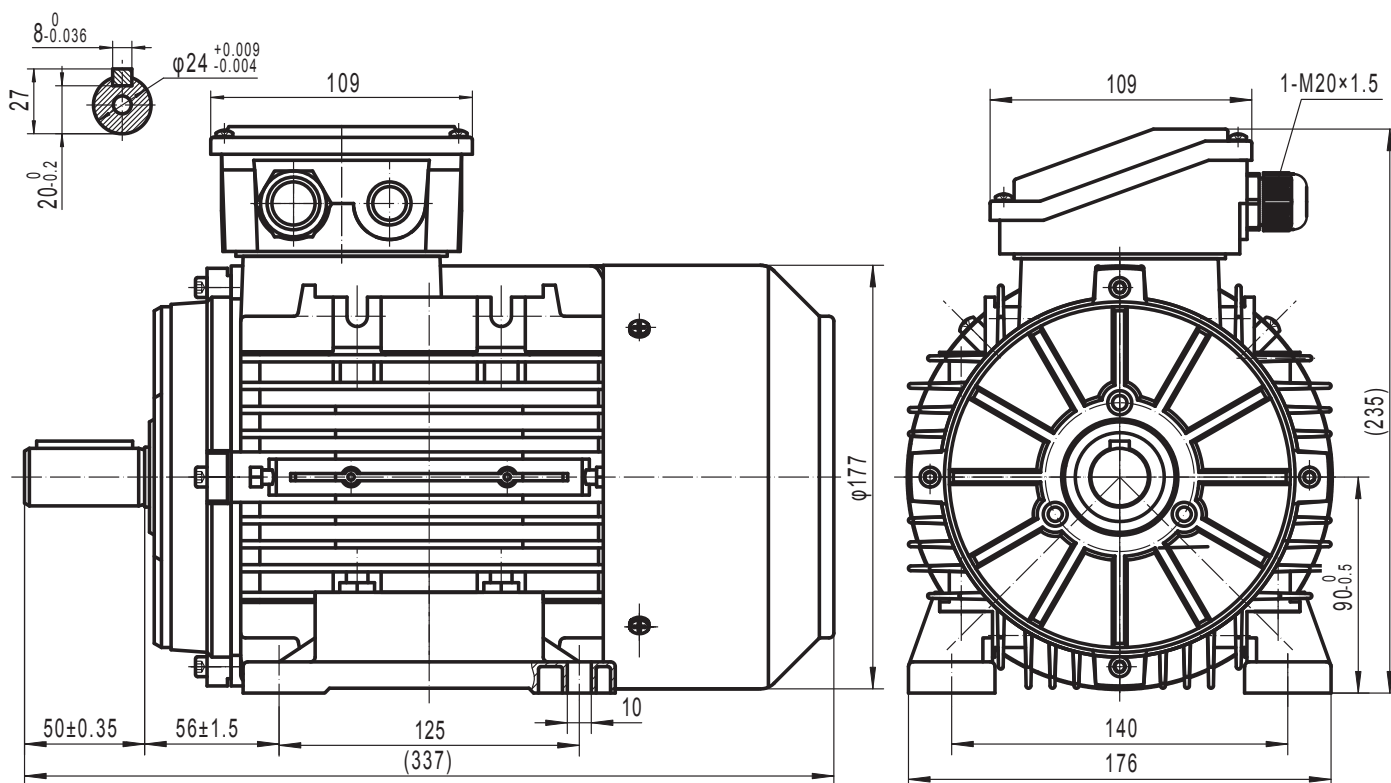

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no