


Three-phase asynchronous motor in cast iron

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	30	50		
690	30	50		
460	34,5	60		

Duty	S1		
Enclosure	IP55		
Insulation class	F	Painting	Standard
Cooling	IC411 (TEFC)	Color	RAL 9005
Max. ambient temp.	40°C	Weight kg	205
Min. ambient temp.	-20°C	Bearing DE	6311 C3
Max. temp. rise	80 K	Bearing NDE	6311 C3
Max altitude, masl	1000	Balance grade	Normal
		Cable entries	2xM32, 1xM16

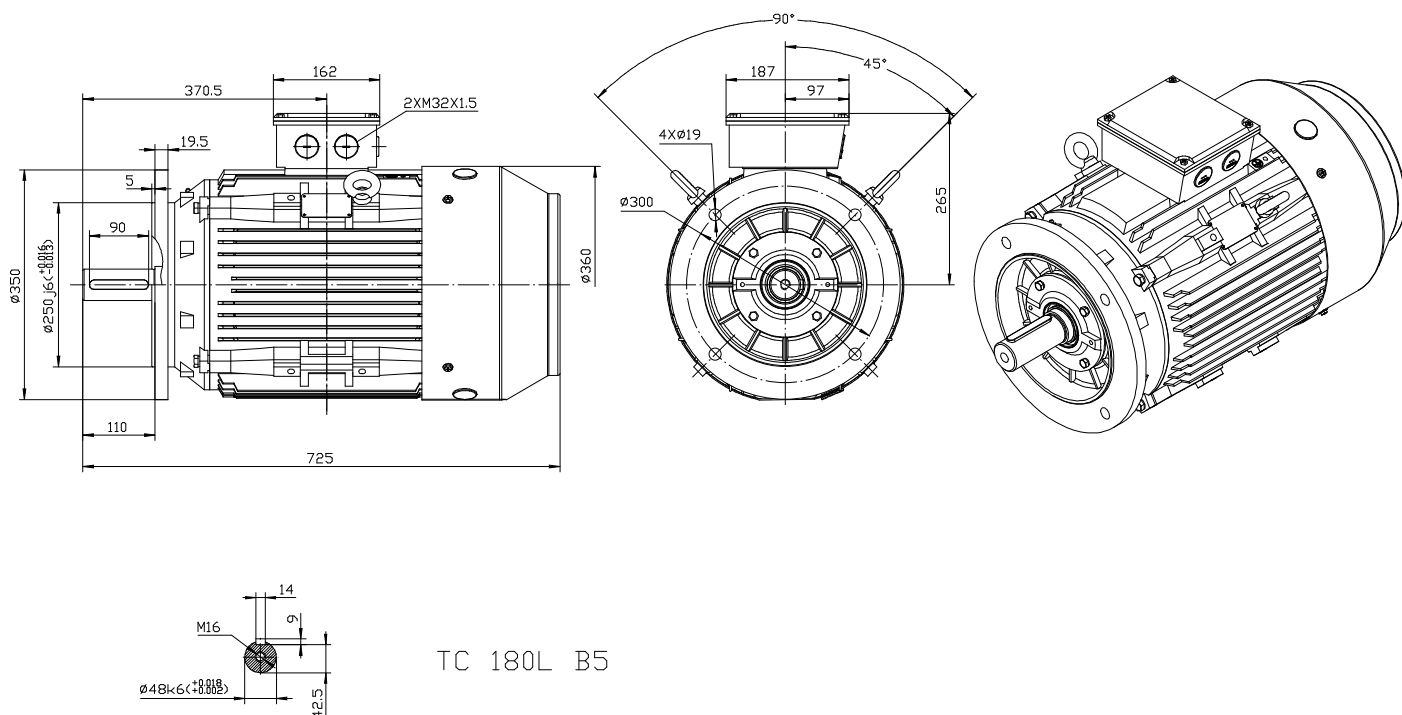

TC 180L B5

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no