

T3CR200LB-4 37KW 400/690V B3NU312




Three-phase asynchronous motor in aluminum

Motor type T3CR200LB-4 37KW 400/690V B3NU312
Brand BUSCK
Item number P3042001RLT

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	37	50	72,5	1480
690	37	50	41,7	1480
460	42,55	60	72,5	1776

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	93,3
Insulation class	F	Power fact, load 100%	0,79
Cooling	IC411 (TEFC)		
Max. ambient temp.	40°C	Painting	Standard
Min. ambient temp.	-20°C	Color	RAL 9005
Max. temp. rise	80 K	Weight kg	270
Max altitude, masl	1000	Sound pressure Lp dB(A)	79
		Bearing DE	NU312
Torque, Nm	238,75	Bearing NDE	6312
Starting torque ratio	3,45	Balance grade	Normal
Starting current ratio	9,26	Cable entries	2xM50, 1xM16

Note IE3
med rullager DE
kopplingslåda vänster sida
platt kopplingslåda som T1C

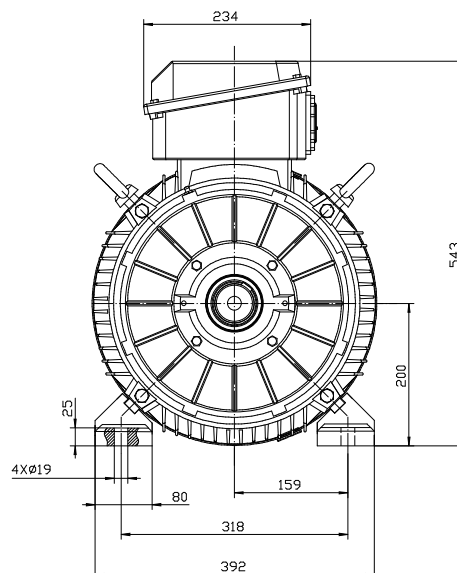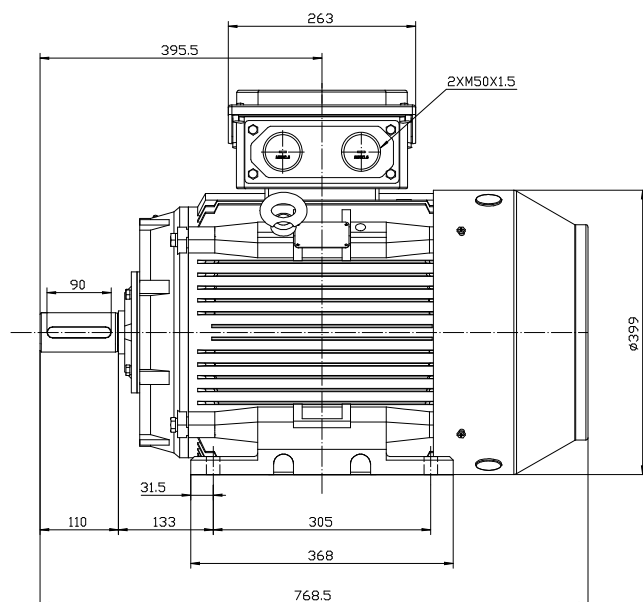

TC 200L B3

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no