

T3CR200LB-4 37KW 400/690V B3




Three-phase asynchronous motor in cast iron

Motor type T3CR200LB-4 37KW 400/690V B3
Brand BUSCK
Item number P3042001T

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	37	50	72,5	1480
690	37	50	41,7	1480
460	42,55	60	72,5	1776

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	93,3
Insulation class	F	Power fact, load 100%	0,79
Cooling	IC411 (TEFC)	Painting	Standard
Max. ambient temp.	40°C	Color	RAL 9005
Min. ambient temp.	-20°C	Weight kg	270
Max. temp. rise	80 K	Sound pressure Lp dB(A)	79
Max altitude, masl	1000	Bearing DE	6312 C3
		Bearing NDE	6312 C3
Torque, Nm	238,75	Balance grade	Normal
Starting torque ratio	3,45	Cable entries	2xM50, 1xM16
Starting current ratio	9,26		

Note IE3

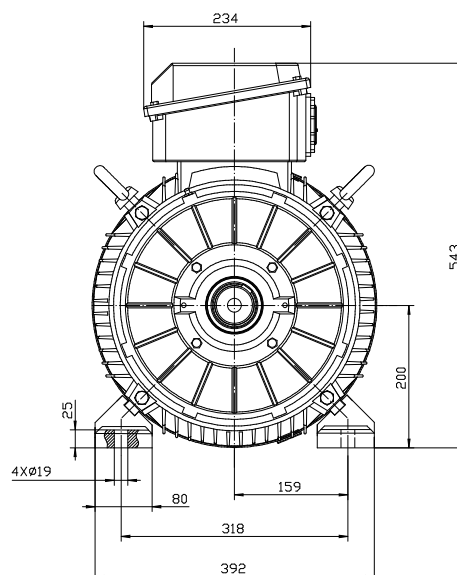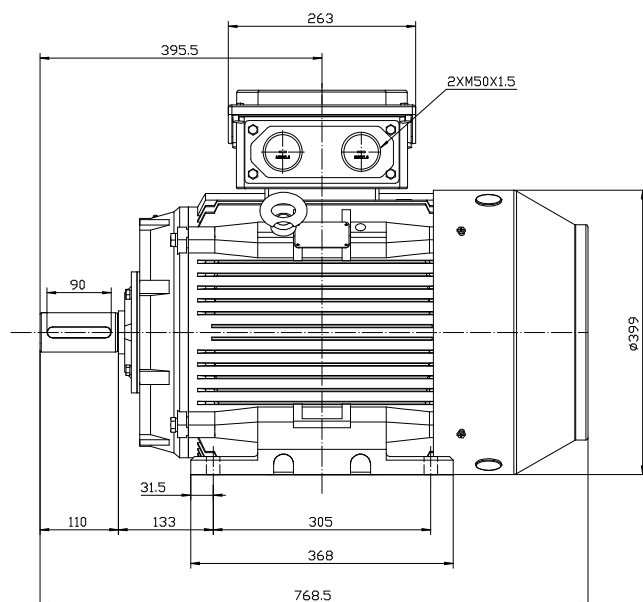

TC 200L B3

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no