


ZWE225MB-4 55KW 400/690V B3

Three-phase asynchronous motor in cast iron

Motor type ZWE225MB-4 55KW 400/690V B3
Brand BUSCK
Item number P3042251

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	55	50	98,0	1475
690	55	50	56,4	1475
460	63,25	60	98,0	1770

Duty	S1	Efficiency class	IE2
Enclosure	IP55	Efficiency, load 100%	93,8
Insulation class	F	Efficiency, load 75%	93,6
Cooling	IC411 (TEFC)	Efficiency, load 50%	92,2
Max. ambient temp.	40°C	Power fact, load 100%	0,86
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	326
Torque, Nm	355	Sound pressure Lp dB(A)	68
Starting torque ratio	2,2	Bearing DE	6314C3
Pull out torque ratio	2,5	Bearing NDE	6312C3
Starting current ratio	7,5	Balance grade	Normal
Winding protection	Thermistors	Inertia kgm2	0,64
		Cable entries	2xM50 + 1xM16
Note	IE2		

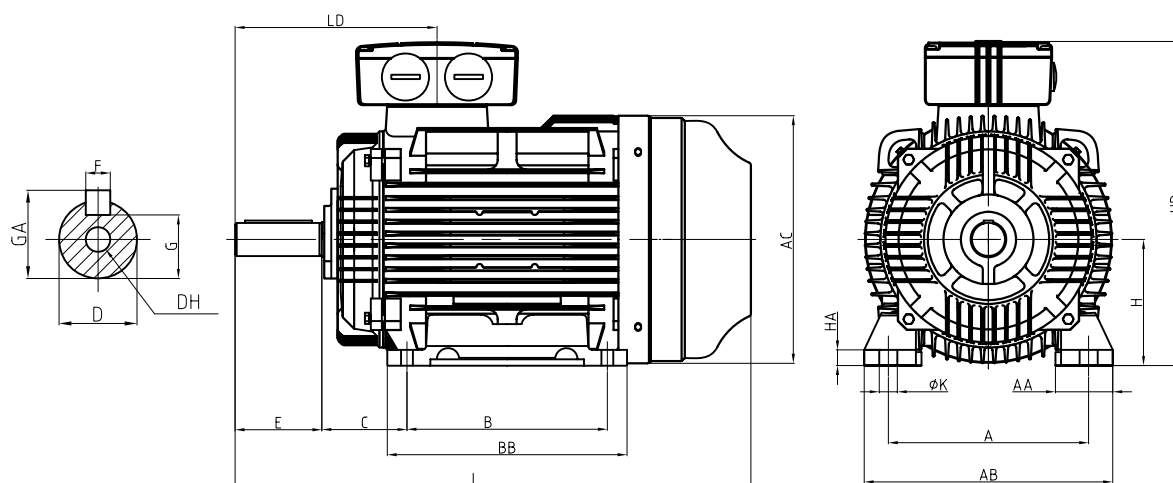

A	B	B1	C	H	D	E	F	G	DH	GA	AA	AB	AC	HA	HD	BB	LD	L
356	311		149	225	60	140	18	53	M20	64	79	430	450	28	555	390	333	850