


ZSWE250MB-4 75KW 400/690V B3

Three-phase asynchronous motor in cast iron

Motor type ZSWE250MB-4 75KW 400/690V B3
 Brand BUSCK
 Item number P3042501z

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	75	50	133,0	1480
690	75	50	76,5	1480
460	86,25	60	133,0	1776

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	95,0
Insulation class	F	Efficiency, load 75%	94,9
Cooling	IC411 (TEFC)	Efficiency, load 50%	94,3
Max. ambient temp.	40°C	Power fact, load 100%	0,86
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	395
Torque, Nm	484	Sound pressure Lp dB(A)	68
Starting torque ratio	2,5	Bearing DE	6314
Pull out torque ratio	2,7	Bearing NDE	6313
Winding protection	Thermistors	Balance grade	Normal
		Inertia kgm2	0,64
Note	IE3	Cable entries	2xM63 + 1xM16

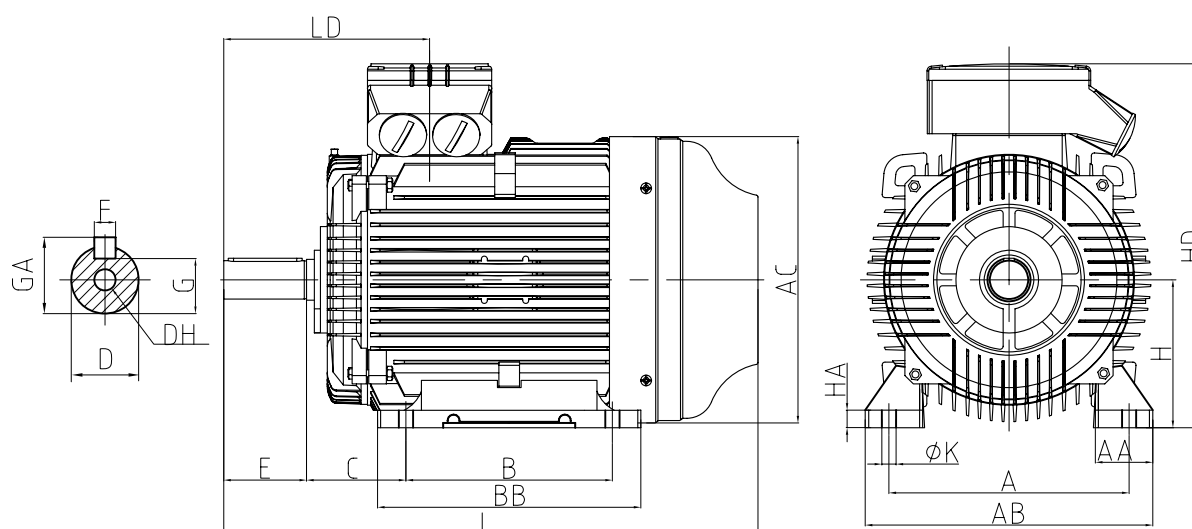

A	B	B1	C	H	D	E	F	G	DH	GA	AA	AB	AC	HA	HD	BB	LD	L
406	349		168	250	65	140	18	58	M20	69	97	485	485	32	622	445	352	915