


T2A132MC-4 11KW 230/400V B3

Three-phase asynchronous motor in aluminum

Motor type T2A132MC-4 11KW 230/400V B3
Brand BUSCK
Item number P3A41321e

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	11	50	36,7	1460
400	11	50	21,1	1460
460	12,65	60	21,1	1752

Duty	S1	Efficiency class	IE2
Enclosure	IP55	Efficiency, load 100%	89,8
Insulation class	F	Efficiency, load 75%	90,1
Cooling	IC411 (TEFC)	Efficiency, load 50%	89,3
Max. ambient temp.	40°C	Power fact, load 100%	0,85
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	66,2
Torque, Nm	72	Sound pressure Lp dB(A)	71
Starting torque ratio	2,2	Bearing DE	6308-2Z/C3
Starting current ratio	7,5	Bearing NDE	6208-2Z/C3
		Balance grade	Normal
Note	IE2	Cable entries	2xM25, 1xM16

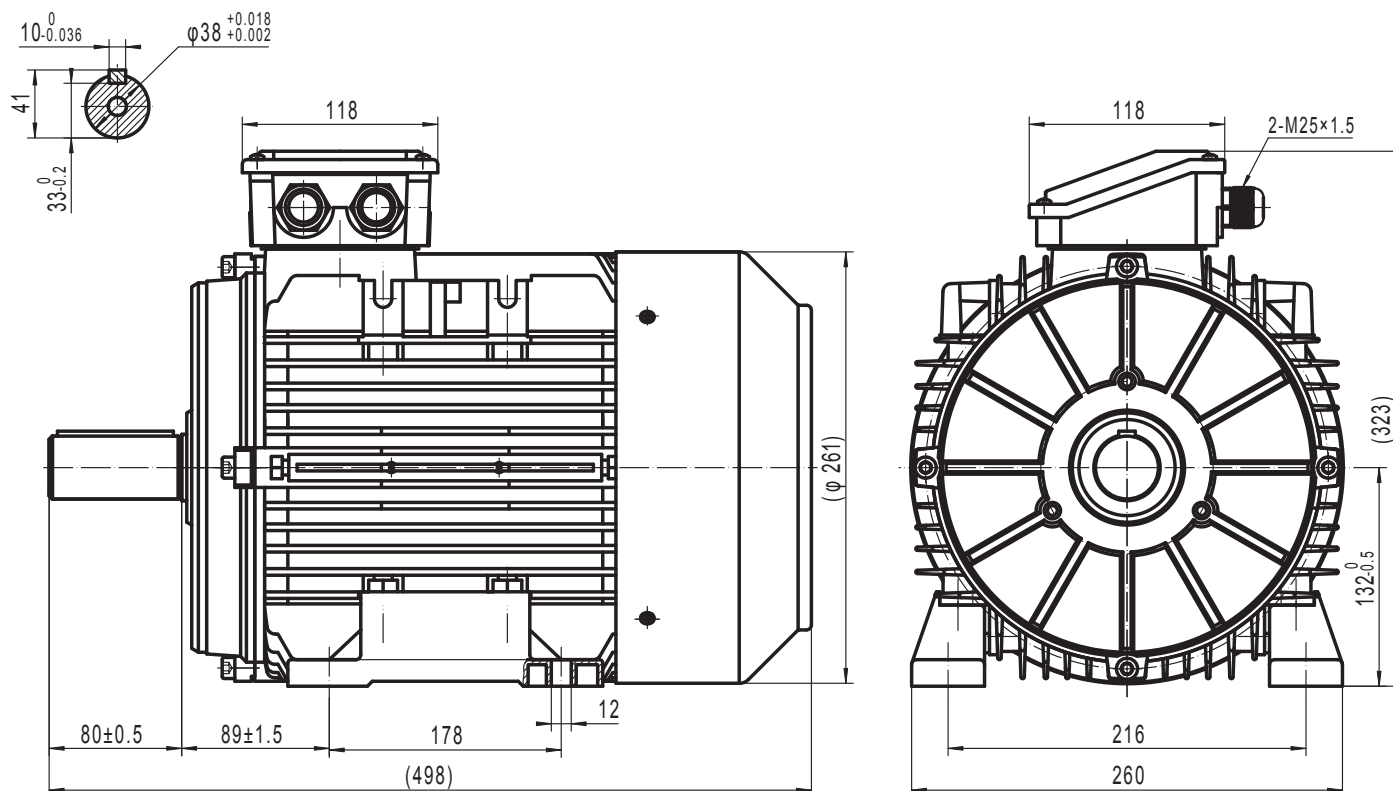

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no