

T3A132SA-2 5,5KW 400/690V B3 ATEX ZON 2/22


Three-phase asynchronous motor in aluminum

Motor type T3A132SA-2 5,5KW 400/690V B3 ATEX ZON 2/22
 Brand BUSCK
 Item number Q3021321e

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	5,5	50	10	2930
690	5,5	50	5,75	2930
460	6,33	60	10	3516

Duty	S1	Efficiency class	IE3
Enclosure	IP65	Efficiency, load 100%	89,2
Insulation class	F	Efficiency, load 75%	89,4
Cooling	IC411 (TEFC)	Efficiency, load 50%	88,2
Max. ambient temp.	40°C	Power fact, load 100%	0,89
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	43,4
Torque, Nm	17,93	Sound pressure Lp dB(A)	80
Starting torque ratio	3,2	Bearing DE	6308-2Z/C3
Pull up torque ratio	2,5	Bearing NDE	6208-2Z/C3
Pull out torque ratio	4	Balance grade	Normal
Starting current ratio	10	Inertia kgm ²	0,0152116
Winding protection	Thermistors	Cable entries	2xM25, 1xM16

Note ATEX II 3 D Ex tc IIIC T125°C Dc ZONE 22
 ATEX II 3 G Ex nA IIC T4 Gc ZONE 2
 IP65, Termistorer

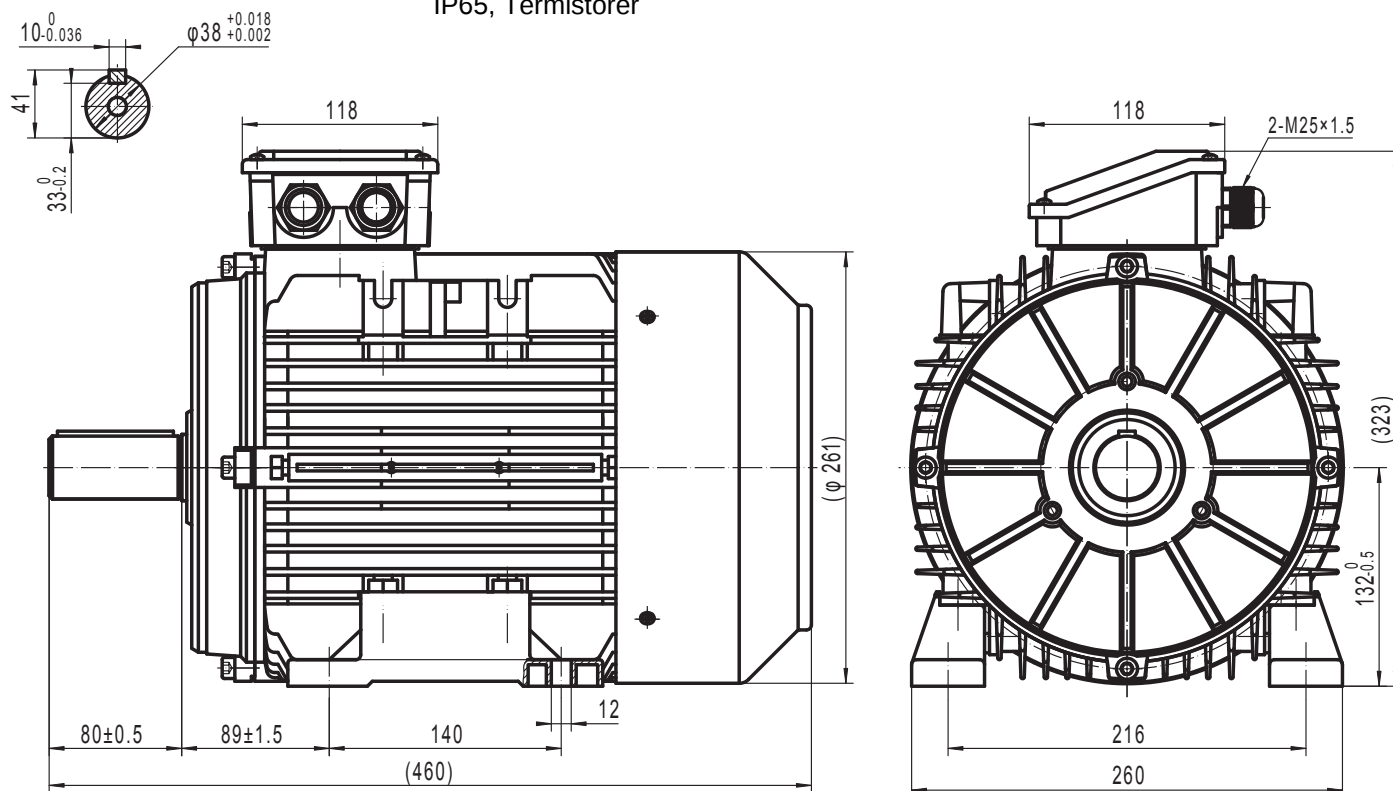

BUSCK
 www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
 info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
 info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
 info@busck.no