


Three-phase asynchronous motor in cast iron

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	4	50	7,9	1455
690	4	50	4,54	1455
460	4,6	60	7,9	1746

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	87,0
Insulation class	H	Power fact, load 100%	0,83
Cooling	IC418 (Non ventilated)		
Max. ambient temp.	90°C	Painting	Standard
Min. ambient temp.	-20°C	Color	RAL 9005
Max. temp. rise	80 K	Weight kg	43
Max altitude, masl	1000	Balance grade	Normal
		Inertia kgm2	0,019
Torque, Nm	26,3	Cable entries	2xM32
Starting current ratio	8,4		

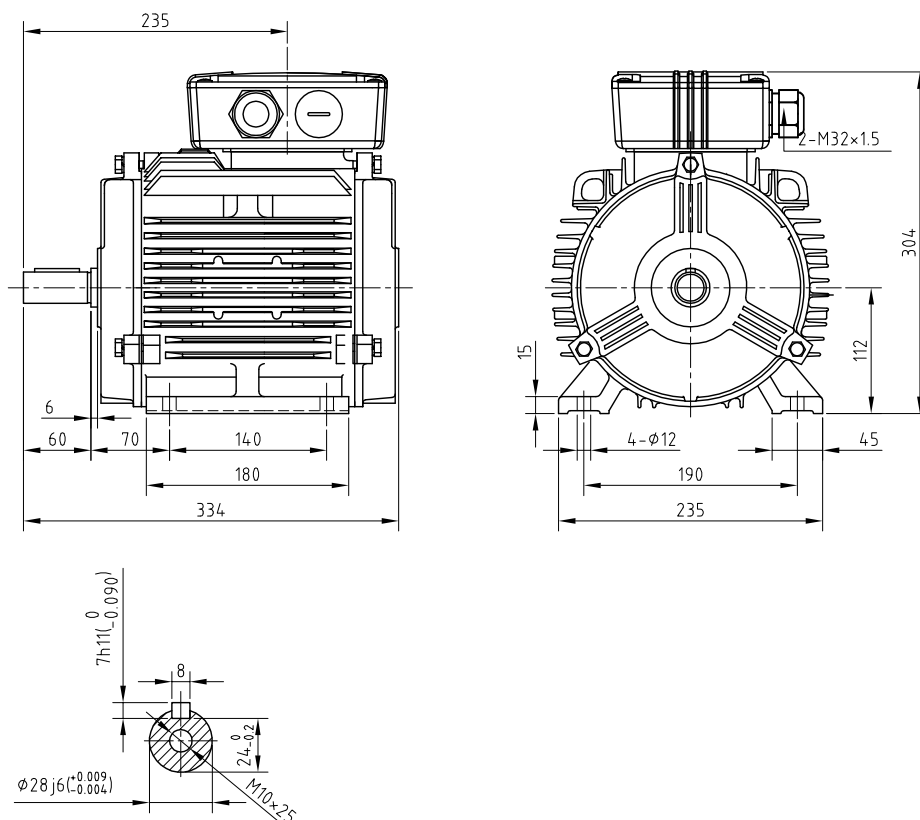

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no