

T3W112M-4 4KW 400/690V B3




Three-phase asynchronous motor in cast iron

Motor type T3W112M-4 4KW 400/690V B3
Brand BUSCK
Item number V3041121TS

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	4	50	8,0	1440
690	4	50	4,6	1440
460	4,6	60	8,0	1728

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	88,6
Insulation class	H	Efficiency, load 75%	88,9
Cooling	IC418 (Non ventilated)	Efficiency, load 50%	87,5
Max. ambient temp.	90°C	Power fact, load 100%	0,82
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	43
Torque, Nm	26,5	Sound pressure Lp dB(A)	65
Starting torque ratio	2,5	Bearing DE	6306-2Z/C4WT
Winding protection	PTC 180°C	Bearing NDE	6306-2Z/C4WT
		Balance grade	Normal
		Inertia kgm2	0,015

Note Speedi sleeve
Internal tropicalization

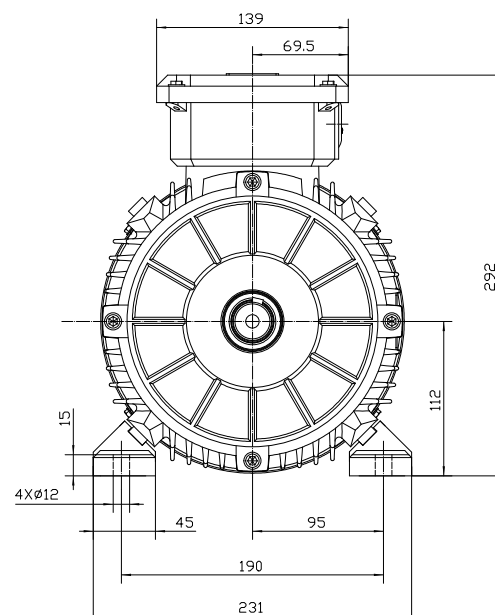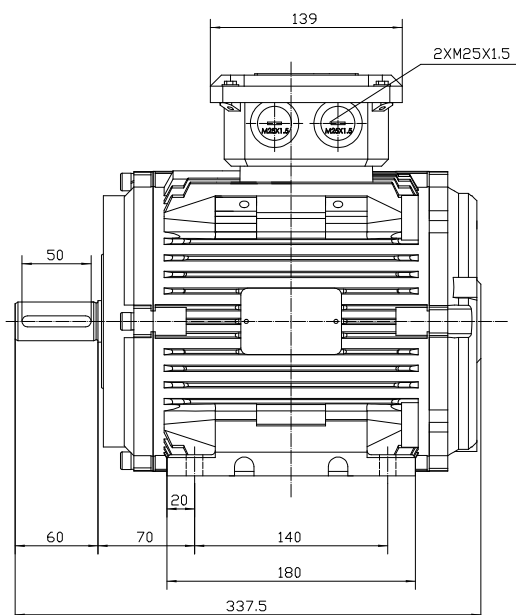

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no