




T3W160L-4 15KW 400/690V B3

Three-phase asynchronous motor in cast iron

Motor type T3W160L-4 15KW 400/690V B3
 Brand BUSCK
 Item number V3041611TS

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	15	50	27,3	1450
690	15	50	15,7	1450
460	17,25	60	27,3	1740

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	92,1
Insulation class	H	Efficiency, load 75%	92,9
Cooling	IC418 (Non ventilated)	Efficiency, load 50%	92,2
Max. ambient temp.	90°C	Power fact, load 100%	0,86
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	135
Torque, Nm	98,8	Sound pressure Lp dB(A)	75
Starting torque ratio	2,5	Bearing DE	6309 C4
Winding protection	PTC 180°C	Bearing NDE	6309 C4
		Grease	Mobil Mobilith SHC200
		Balance grade	Normal
Note	Speedi sleeve	Inertia kgm2	0,138
	Internal tropicalization	Cable entries	2xM32, 1xM12

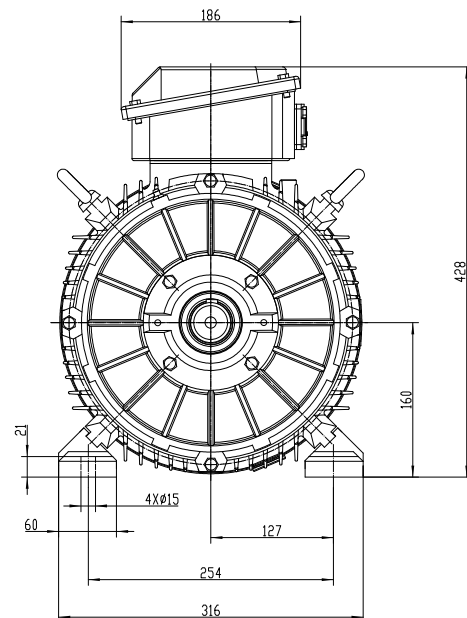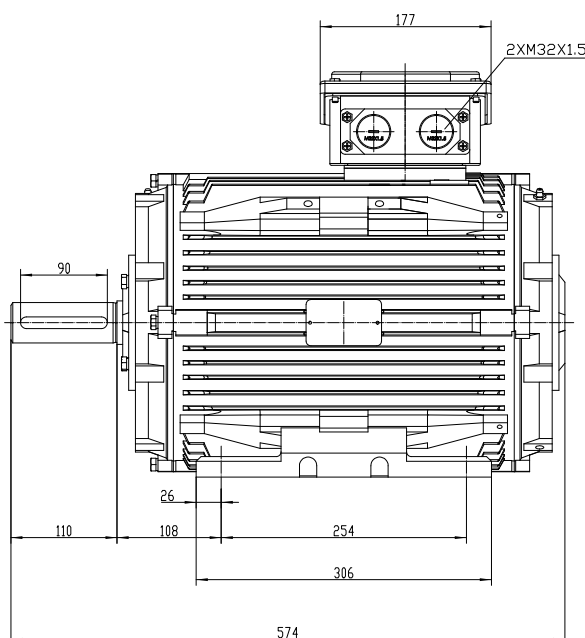

TC 160L B3

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no