




T3W200L-4 30KW 400/690V B3

Three-phase asynchronous motor in cast iron

Motor type T3W200L-4 30KW 400/690V B3
 Brand BUSCK
 Item number V3042001T

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	30	50	57,1	1470
690	30	50	32,8	1470
460	34,5	60	57,1	1764

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	93,6
Insulation class	H	Efficiency, load 75%	93,7
Cooling	IC418 (Non ventilated)	Efficiency, load 50%	93,2
Max. ambient temp.	90°C	Power fact, load 100%	0,81
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	245
Torque, Nm	195	Sound pressure Lp dB(A)	79
Starting torque ratio	2,5	Bearing DE	6312 C4
Pull up torque ratio	1,8	Bearing NDE	6312 C4
Pull out torque ratio	2,8	Balance grade	Normal
Starting current ratio	9,0	Inertia kgm ²	0,294
		Cable entries	2xM50, 1xM12

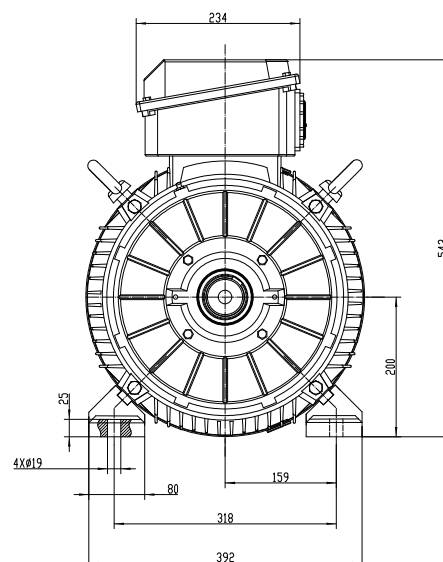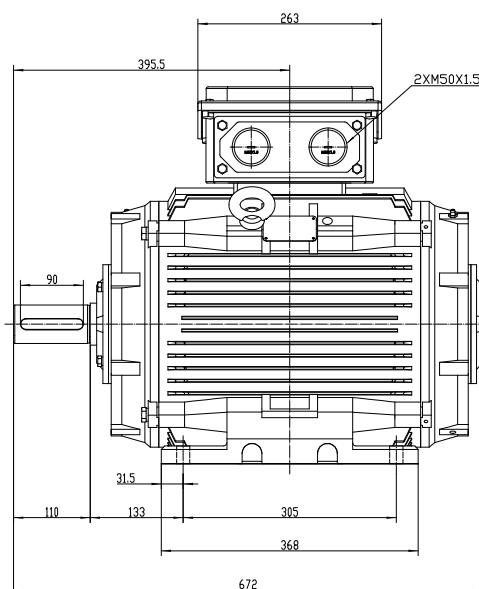

TC 200L B3

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no