

# SB040 15 63B14 H18


## Busck wormgear in aluminum

|             |                                                                    |
|-------------|--------------------------------------------------------------------|
| Type        | SB040 15 63B14 H18                                                 |
| Brand       | BUSCK                                                              |
| Item number | WP041506                                                           |
| Ratio       | 15                                                                 |
| Painting    | Powder coating. Silver RAL 9006                                    |
| Oil         | 0,08 liter full synthetic oil AGIP Telium VSF320 (Polyglycol base) |
| Hollowshaft | 18 mm                                                              |
| Weight      | 2,3kg                                                              |

### Gear motor data for some motors

| Motor                    | Speed   | Torque | Service factor |
|--------------------------|---------|--------|----------------|
| T2A63A-2 ,18 kW 2840 rpm | 189 rpm | 8 Nm   | 4,1            |
| T2A63B-2 ,25 kW 2840 rpm | 189 rpm | 11 Nm  | 2,9            |
| T2A63A-4 ,12 kW 1395 rpm | 93 rpm  | 10 Nm  | 4,0            |
| T2A63B-4 ,18 kW 1350 rpm | 90 rpm  | 16 Nm  | 2,6            |
| T2A63C-4 ,25 kW 1360 rpm | 91 rpm  | 21 Nm  | 1,9            |
| T2A63B-6 ,12 kW 850 rpm  | 57 rpm  | 16 Nm  | 2,8            |

**Drawing on next page**

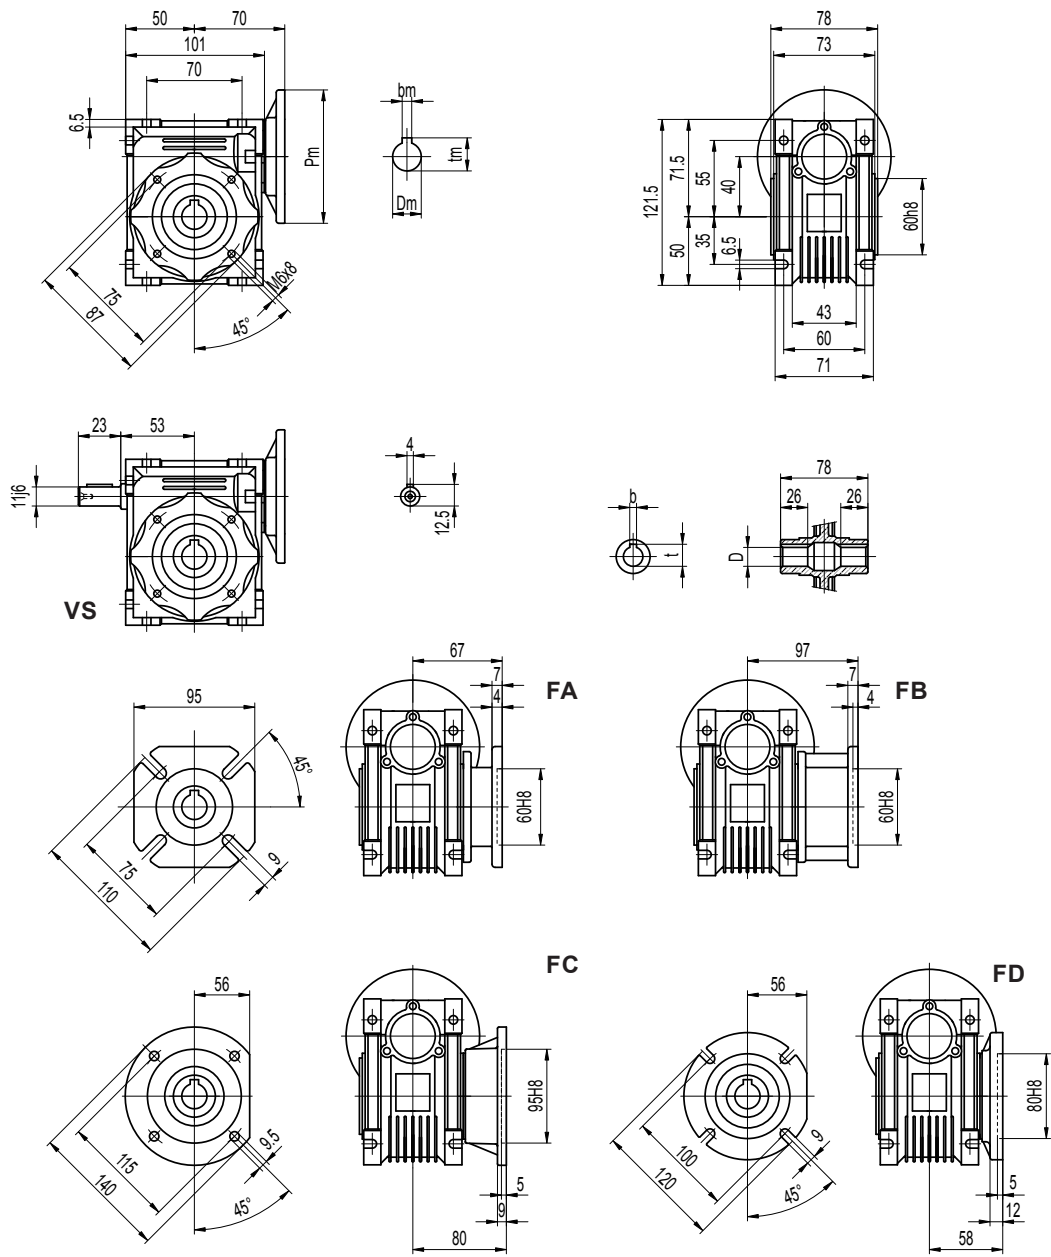

(..) Only on request  
Weight: 2,3 kg

| Hollow shaft |     |        |
|--------------|-----|--------|
| D H8         | b   | t      |
| 18           | 6   | 20,8   |
| (19)         | (6) | (21,8) |