

# SB040 60 63B14 H19


## Busck wormgear in aluminum

|             |                                                                    |
|-------------|--------------------------------------------------------------------|
| Type        | SB040 60 63B14 H19                                                 |
| Brand       | BUSCK                                                              |
| Item number | WP046006X                                                          |
| Ratio       | 60                                                                 |
| Painting    | Powder coating. Silver RAL 9006                                    |
| Oil         | 0,08 liter full synthetic oil AGIP Telium VSF320 (Polyglycol base) |
| Hollowshaft | 19 mm                                                              |
| Weight      | 2,3kg                                                              |

### Gear motor data for some motors

| Motor                    | Speed  | Torque | Service factor |
|--------------------------|--------|--------|----------------|
| T2A63A-2 ,18 kW 2840 rpm | 47 rpm | 24 Nm  | 1,2            |
| T2A63B-2 ,25 kW 2840 rpm | 47 rpm | 33 Nm  | 0,9            |
| T2A63A-4 ,12 kW 1395 rpm | 23 rpm | 29 Nm  | 1,2            |
| T2A63B-4 ,18 kW 1350 rpm | 23 rpm | 45 Nm  | 0,8            |
| T2A63C-4 ,25 kW 1360 rpm | 23 rpm | 62 Nm  | 0,6            |
| T2A63B-6 ,12 kW 850 rpm  | 14 rpm | 45 Nm  | 0,9            |

**Drawing on next page**

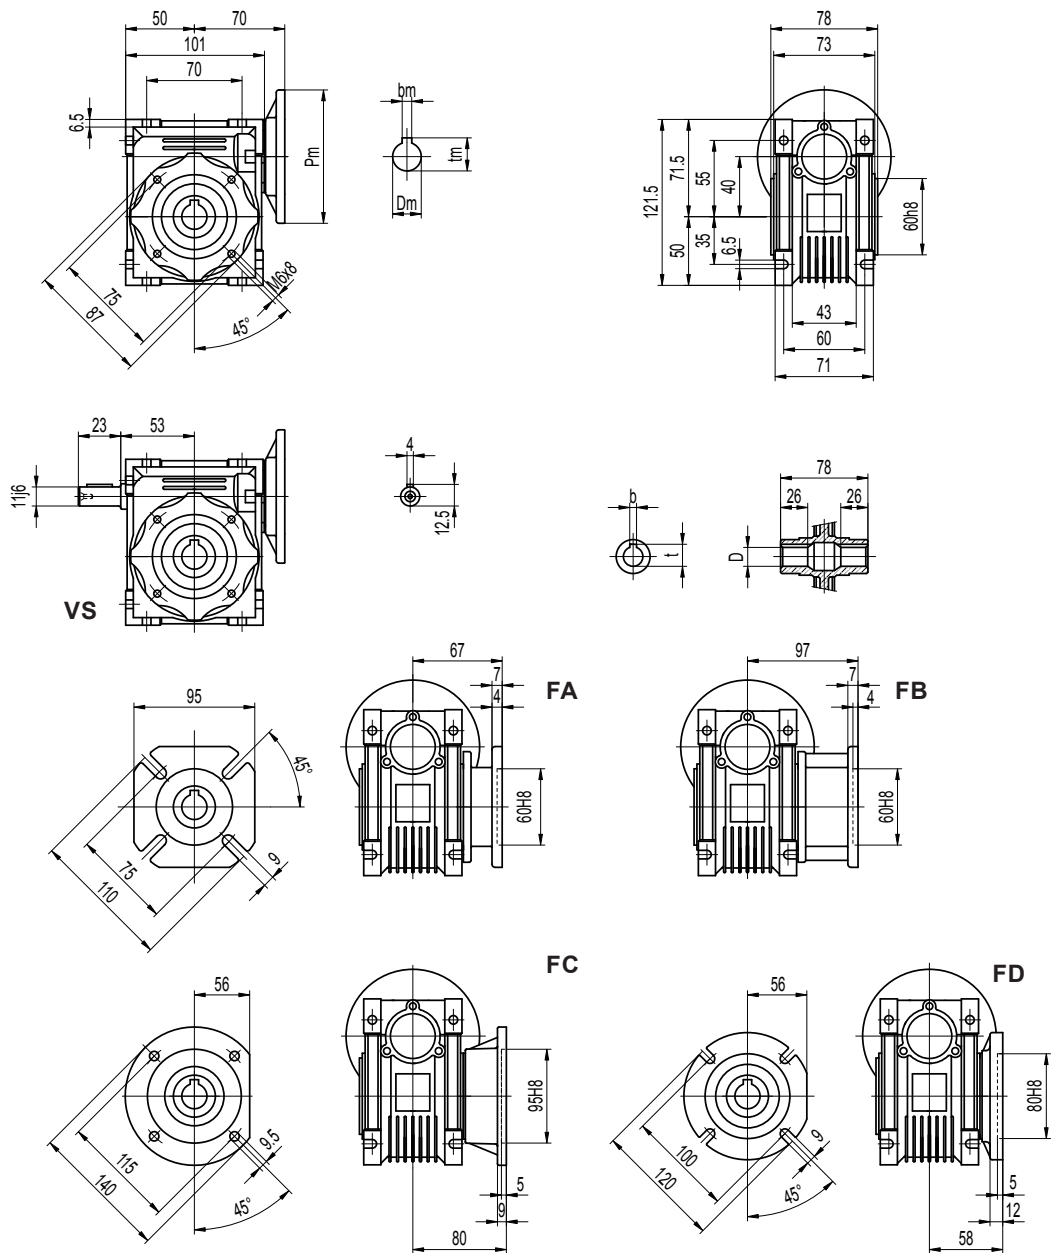

(..) Only on request  
Weight: 2,3 kg

| Hollow shaft |     |        |
|--------------|-----|--------|
| D H8         | b   | t      |
| 18           | 6   | 20,8   |
| (19)         | (6) | (21,8) |