


MSD132MA-4/6 5,5/1,6KW 400V B3

Three-phase asynchronous motor in aluminum

Motor type MSD132MA-4/6 5,5/1,6KW 400V B3
Brand BUSCK
Item number X30C1331

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	5,5/1,6	50	11,1/4,69	1450/975

Duty	S1	Efficiency, load 100%	85,0/73,5
Enclosure	IP55	Painting	Standard
Insulation class	F	Color	RAL 9005
Cooling	IC411 (TEFC)	Weight kg	45
Max. ambient temp.	40°C	Bearing DE	6308-2Z/C3
Min. ambient temp.	-20°C	Bearing NDE	6208-2Z/C3
Max. temp. rise	80 K	Balance grade	Normal
Max altitude, masl	1000	Cable entries	2xM25
Torque, Nm	36/15		
Pull out torque ratio	2,4/2,2		
Starting current ratio	7,8/6		

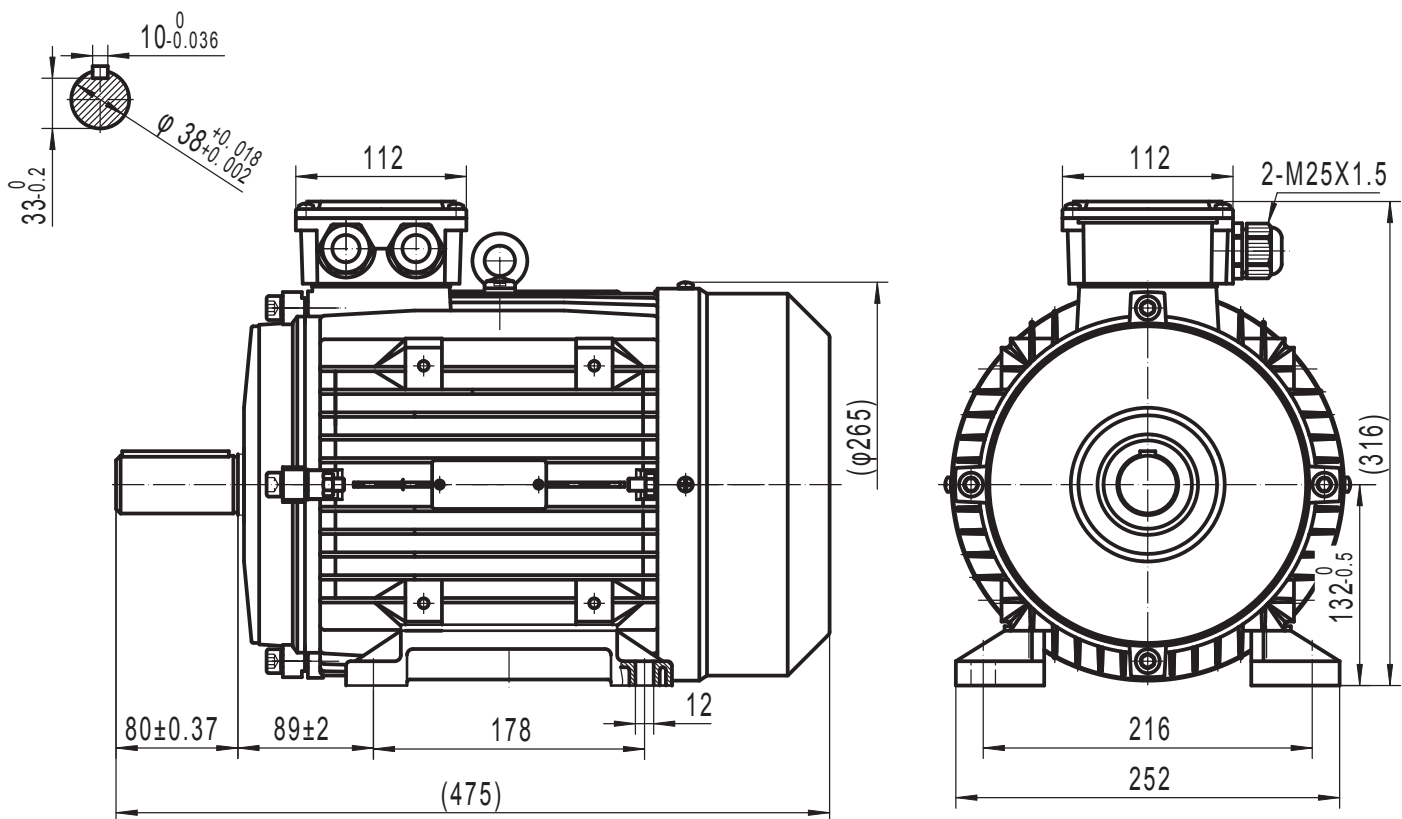

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no