


MSD160L-4/6 15/5KW 400V B3

Three-phase asynchronous motor in aluminum

Motor type MSD160L-4/6 15/5KW 400V B3
Brand BUSCK
Item number X30C1611

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	15/5	50	29/12,5	1450/970

Duty	S1	Efficiency, load 100%	88/80
Enclosure	IP55	Painting	Standard
Insulation class	F	Color	RAL 9005
Cooling	IC411 (TEFC)	Weight kg	84
Max. ambient temp.	40°C	Bearing DE	6309-2Z/C3
Min. ambient temp.	-20°C	Bearing NDE	6309-2Z/C3
Max. temp. rise	80 K	Balance grade	Normal
Max altitude, masl	1000	Cable entries	2xM32 + 1xM16
Torque, Nm	98/48		
Starting current ratio	9/6		

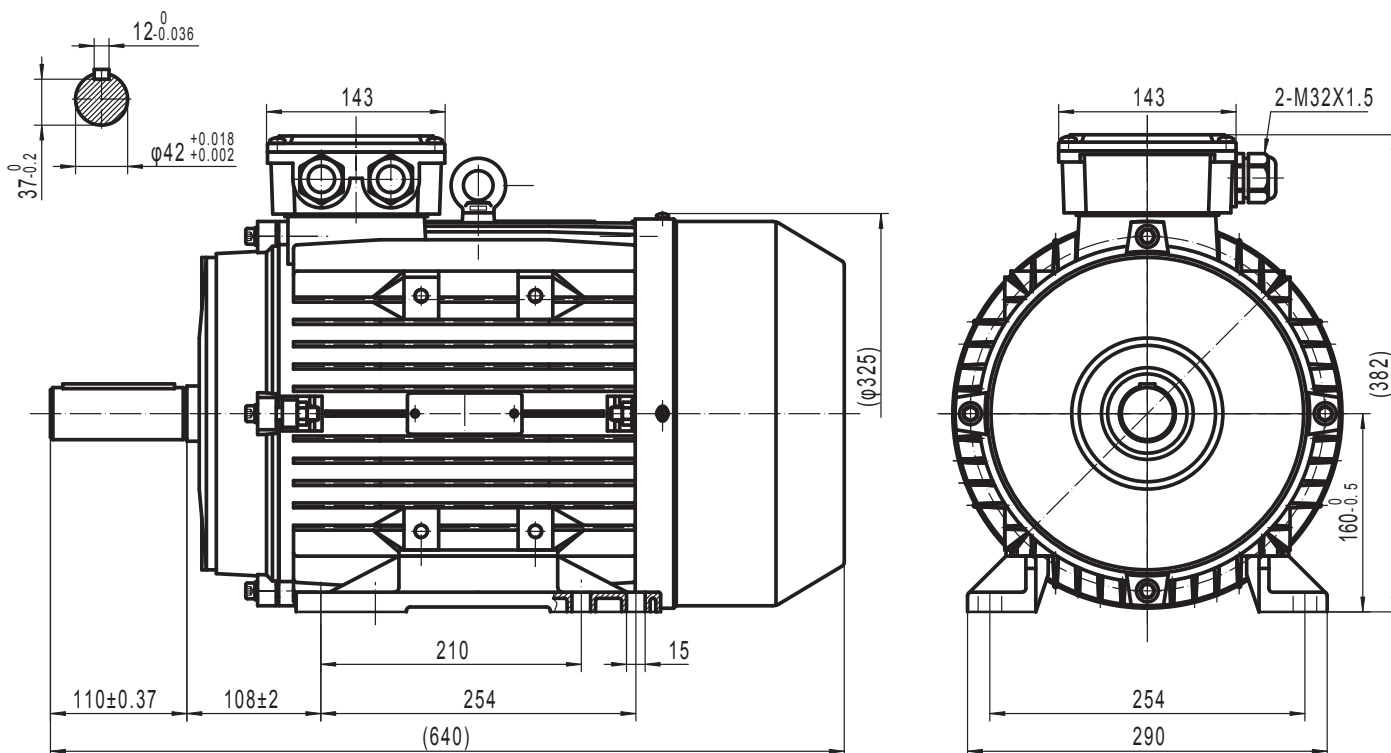

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no