


MSD160L-2/4 19/4,5KW 230V B3

Three-phase asynchronous motor in aluminum

Motor type MSD160L-2/4 19/4,5KW 230V B3
Brand BUSCK
Item number X3AA1611

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	18,5/4,4	50	34/10,5	2940/1470

Duty	S1	Efficiency, load 100%	88/87
Enclosure	IP55	Painting	Standard
Insulation class	F	Color	RAL 9005
Cooling	IC411 (TEFC)	Weight kg	116
Max. ambient temp.	40°C	Bearing DE	6309-2Z/C3
Min. ambient temp.	-20°C	Bearing NDE	6309-2Z/C3
Max. temp. rise	80 K	Balance grade	Normal
Max altitude, masl	1000	Cable entries	2xM32 + 1xM16
Torque, Nm	59/58		
Pull up torque ratio	3,2/3		
Starting current ratio	9,5/7		

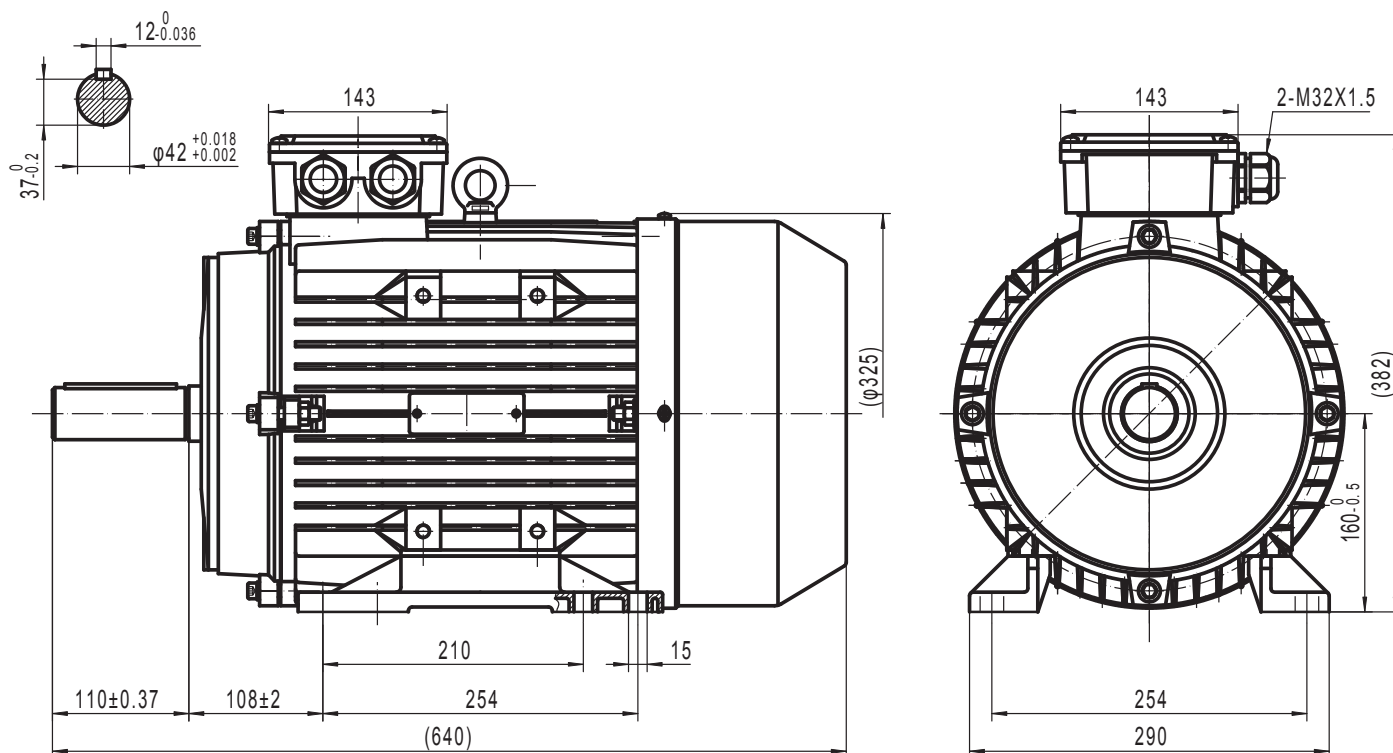

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no