


Three-phase asynchronous motor in aluminum

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	4/1,3	50	15,6/6,9	1440/960

Duty	S1		
Enclosure	IP55	Efficiency, load 100%	80/73
Insulation class	F		
Cooling	IC411 (TEFC)	Painting	Standard
Max. ambient temp.	40°C	Color	RAL 9005
Min. ambient temp.	-20°C	Weight kg	40
Max. temp. rise	80 K	Bearing DE	6308-2Z/C3
Max altitude, masl	1000	Bearing NDE	6208-2Z/C3
		Balance grade	Normal
Torque, Nm	26/12,5	Cable entries	2xM25
Starting current ratio	3,8/5,5		

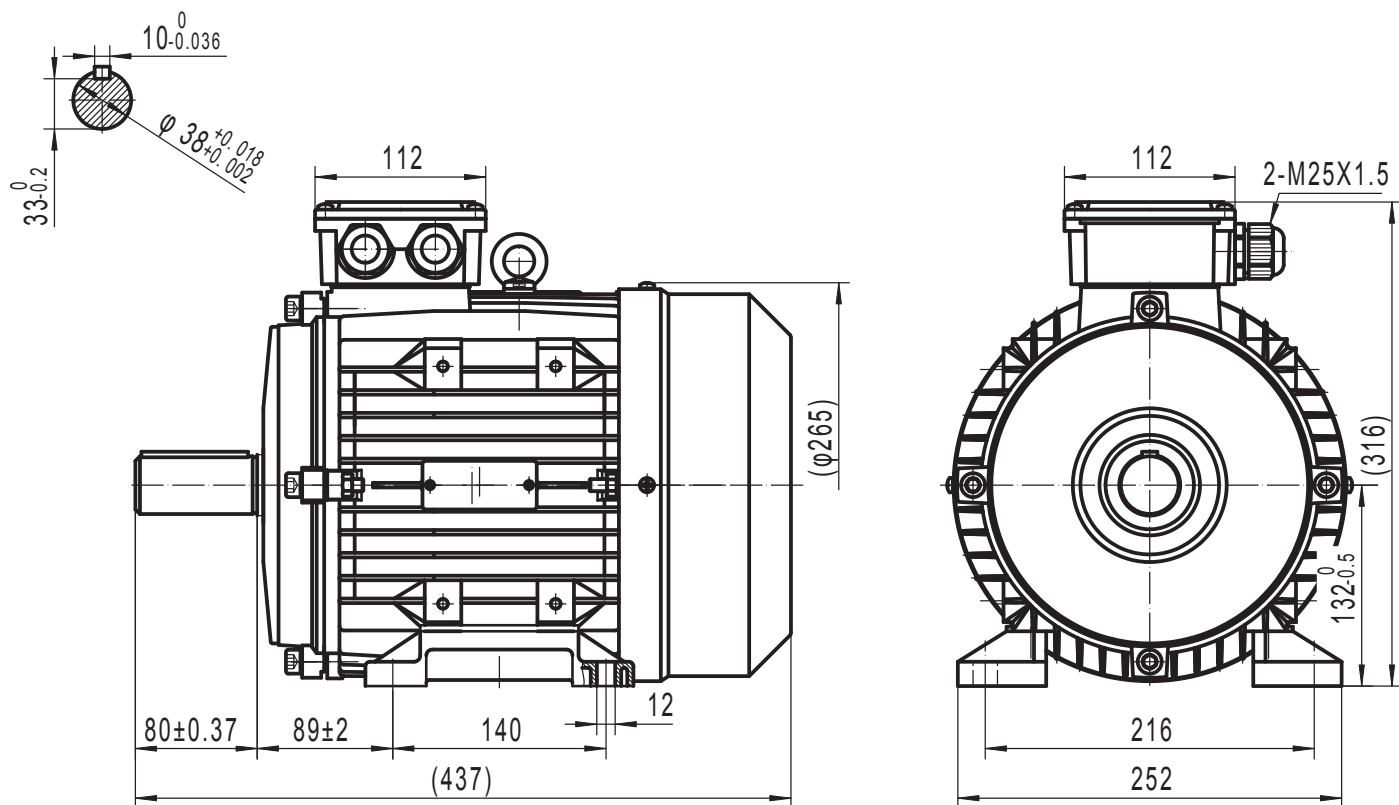

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no