

MSBCCL112L-4 5,5KW 400/690V B3


Three-phase asynchronous brake motor in aluminum

Motor type MSBCCL112L-4 5,5KW 400/690V B3
Brand BUSCK
Item number B3041131

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	5,5	50		1430
690	5,5	50		1430
460	6,33	60		1716

Duty	S1	Efficiency class	EFF2
Enclosure	IP55	Painting	Standard
Insulation class	F	Color	RAL 9005
Cooling	IC411 (TEFC)	Weight kg	38
Max. ambient temp.	40°C	Bearing DE	6306-2Z/C3
Min. ambient temp.	-20°C	Bearing NDE	6206-2Z/C3
Max. temp. rise	80 K	Balance grade	Normal
Max altitude, masl	1000	Cable entries	2xM25

Note Separatmatad DC-broms som matas via likriktare 230VAC.

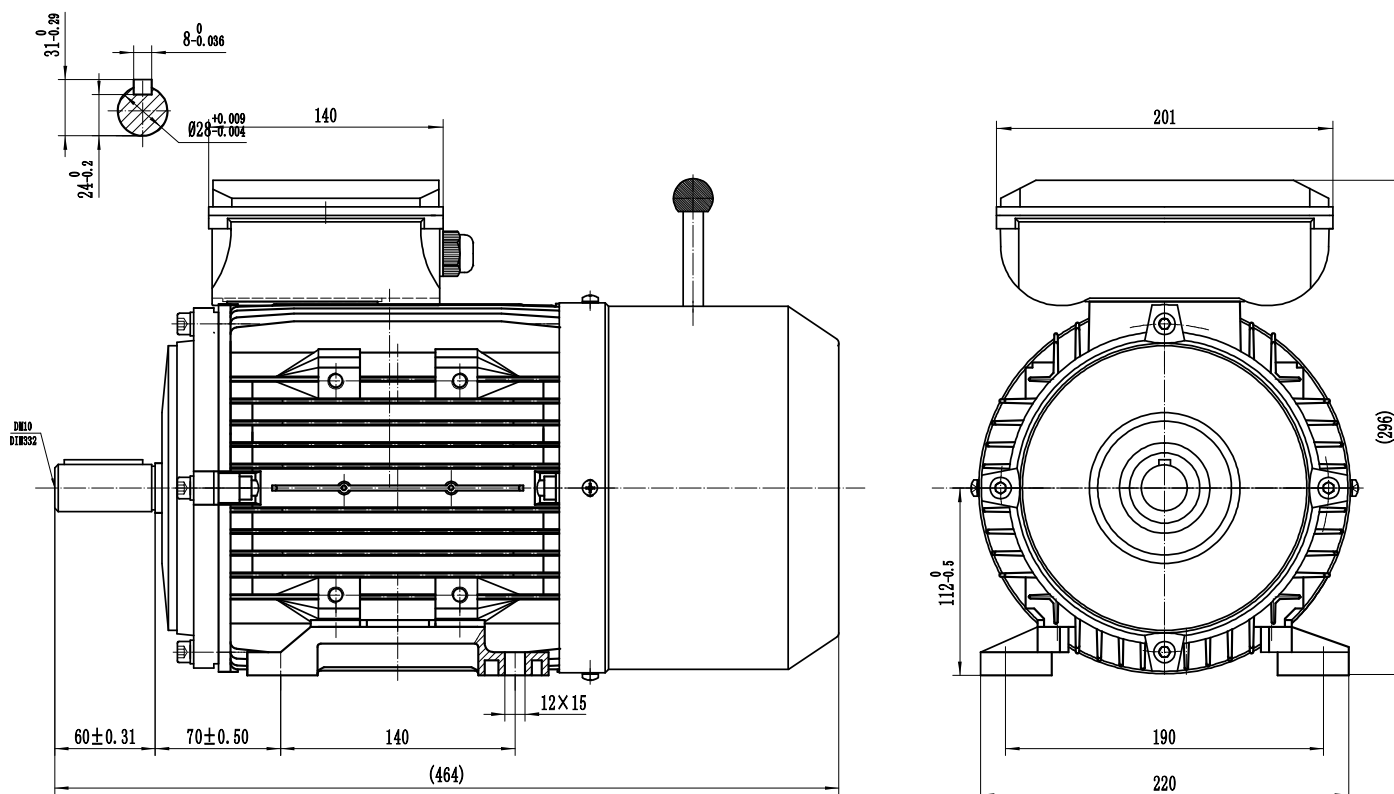

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no