

# SB063 30 90B14 H25


## Busck wormgear in aluminum

|             |                                                                    |
|-------------|--------------------------------------------------------------------|
| Type        | SB063 30 90B14 H25                                                 |
| Brand       | BUSCK                                                              |
| Item number | WP063009                                                           |
| Ratio       | 30                                                                 |
| Painting    | Powder coating. Silver RAL 9006                                    |
| Oil         | 0,30 liter full synthetic oil AGIP Telium VSF320 (Polyglycol base) |
| Hollowshaft | 25 mm                                                              |
| Weight      | 6,2kg                                                              |

## Gear motor data for some motors

| Motor                    | Speed  | Torque | Service factor |
|--------------------------|--------|--------|----------------|
| T3A90S-2 1,5 kW 2900 rpm | 97 rpm | 116 Nm | 1,0            |
| T3A90L-2 2,2 kW 2910 rpm | 97 rpm | 169 Nm | 0,7            |
| T3A90S-4 1,1 kW 1440 rpm | 48 rpm | 156 Nm | 1,0            |
| T3A90L-4 1,5 kW 1440 rpm | 48 rpm | 212 Nm | 0,8            |
| T3A90S-6 ,75 kW 950 rpm  | 32 rpm | 157 Nm | 1,1            |
| T3A90L-6 1,1 kW 950 rpm  | 32 rpm | 231 Nm | 0,8            |

**Drawing on next page**

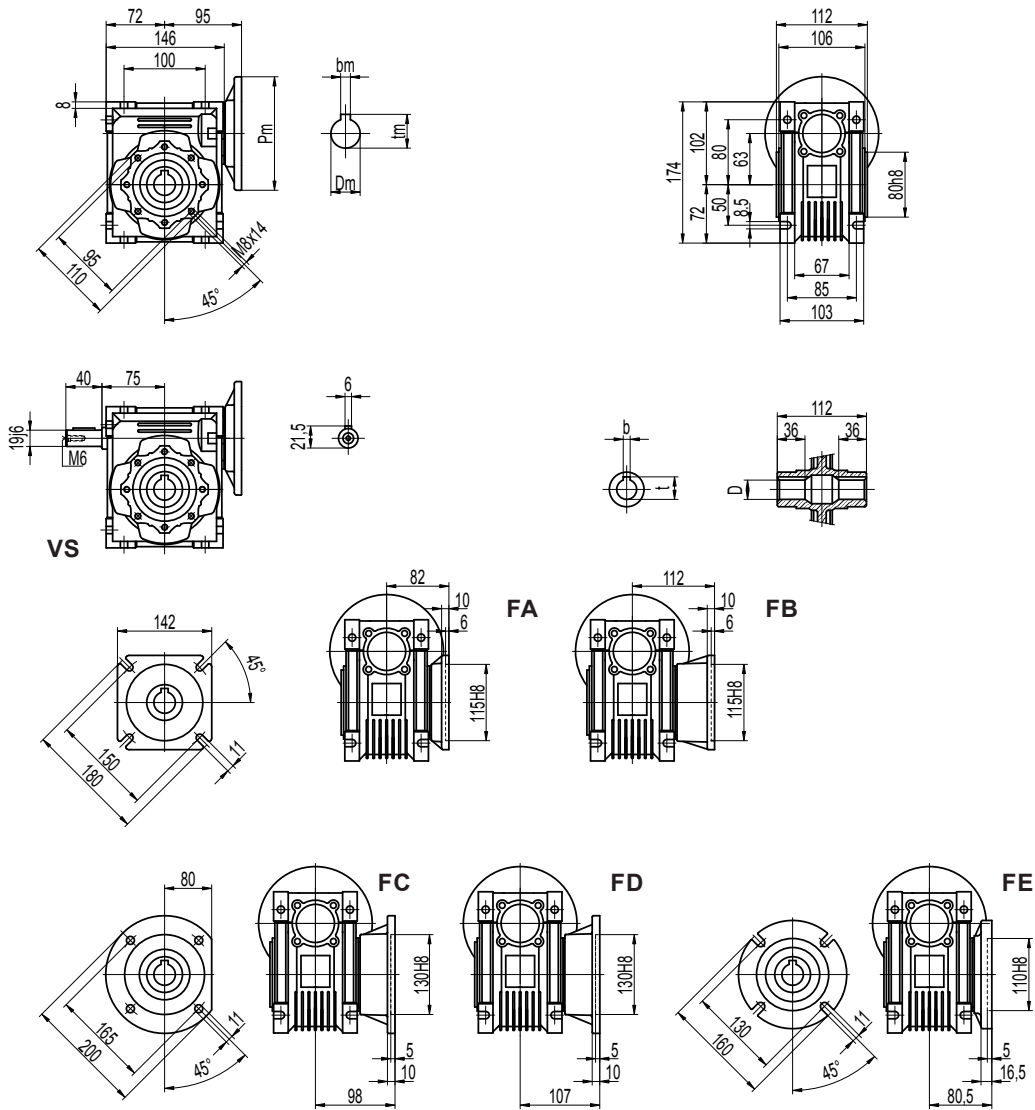

(..) Only on request  
Weight: 6,2 kg

| Hollow shaft |     |        |
|--------------|-----|--------|
| D H8         | b   | t      |
| 25           | 8   | 28,3   |
| (28)         | (8) | (31,3) |