


Y2-355MA-2 220KW 230/400V B3

Three-phase asynchronous motor in cast iron

Motor type Y2-355MA-2 220KW 230/400V B3
 Brand BUSCK
 Item number 03A23551

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	220	50		
400	220	50		
460	253	60		

Duty	S1	Painting	Standard
Enclosure	IP55	Color	RAL 9005
Insulation class	F	Weight kg	1700
Cooling	IC411 (TEFC)	Balance grade	Normal
Max. ambient temp.	40°C		
Min. ambient temp.	-20°C		
Max. temp. rise	80 K		
Max altitude, masl	1000		

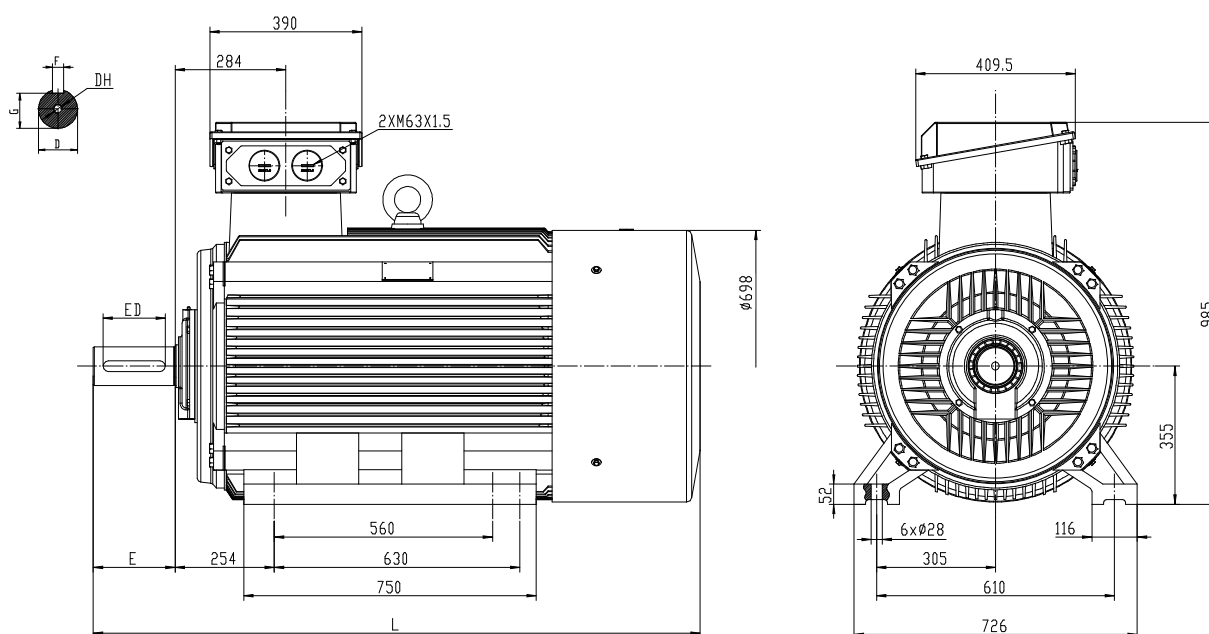

TYPE	D	E	F	G	DH	ED	L	
Y2-355M/L-2P	Ø75	140	20- $\frac{1}{8}$ 043	68	M20x42	110	1500	
Y2-355M/L-4/6/8P	Ø95	170	25- $\frac{1}{8}$ 052	86	M24x50	140	1530	short shaft
Y2-355M/L-4/6/8P	Ø100	210	28- $\frac{1}{8}$ 052	90	M24x50	160	1570	Long shaft

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no