


WE200L-8 15KW 400/690V B3

Three-phase asynchronous motor in cast iron

Motor type WE200L-8 15KW 400/690V B3
 Brand BUSCK
 Item number 83082001

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	15	50	32,1	735
690	15	50	18,5	735
460	17,25	60	32,1	882

Duty	S1	Efficiency class	IE2
Enclosure	IP55	Efficiency, load 100%	89,7
Insulation class	F	Power fact, load 100%	0,75
Cooling	IC411 (TEFC)	Painting	Standard
Max. ambient temp.	40°C	Color	RAL 9005
Min. ambient temp.	-20°C	Weight kg	235
Max. temp. rise	80 K	Sound pressure Lp dB(A)	55
Max altitude, masl	1000	Bearing DE	6312
		Bearing NDE	6212
Torque, Nm	195	Balance grade	Normal
Starting torque ratio	2,3	Inertia kgm2	0,395
Pull out torque ratio	2,3	Cable entries	2xM50 + 1xM16
Starting current ratio	6,6		
Winding protection	Thermistors		

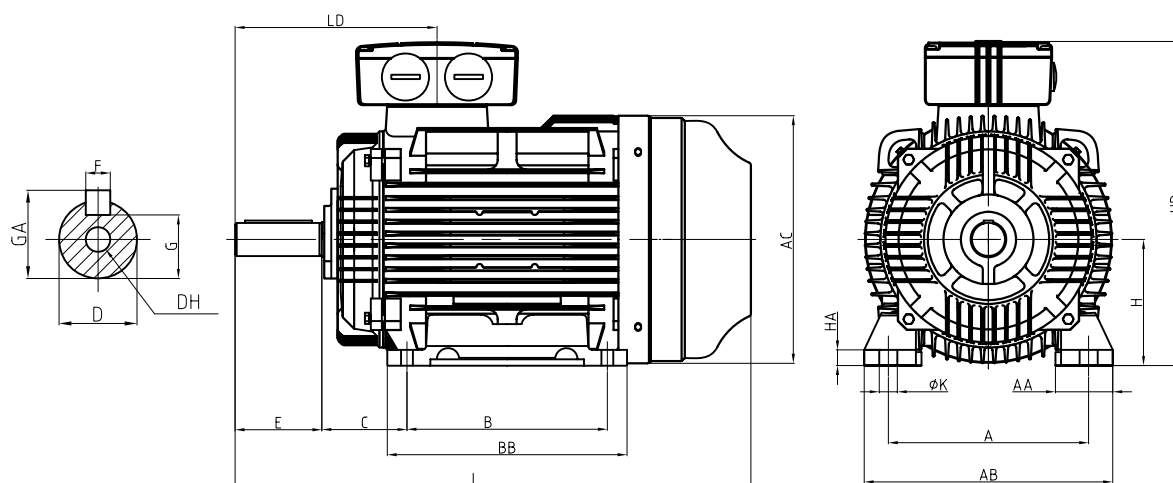

A	B	B1	C	H	D	E	F	G	DH	GA	AA	AB	AC	HA	HD	BB	LD	L
318	305		133	200	55	110	16	49	M20	59	70	388	400	25	510	370	300	780