

YE3-315LB-4 200KW 400/690V B3


Three-phase asynchronous motor in cast iron

Motor type YE3-315LB-4 200KW 400/690V B3
Brand BUSCK
Item number 93043181Z

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	200	50	341,7	1490
690	200	50	196,5	1490
460	230	60	341,7	1788

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	96,0
Insulation class	F	Power fact, load 100%	0,88
Cooling	IC411 (TEFC)	Painting	Standard
Max. ambient temp.	40°C	Color	RAL 9005
Min. ambient temp.	-20°C	Weight kg	1223
Max. temp. rise	80 K	Sound pressure Lp dB(A)	94
Max altitude, masl	1000	Bearing DE	6319C3
		Bearing NDE	6319C3
		Balance grade	Normal
Torque, Nm	2,2		
Starting torque ratio	2,1		
Starting current ratio	7,6		
Winding protection	Thermistors		

Note Axle 90x170 mm
IE3

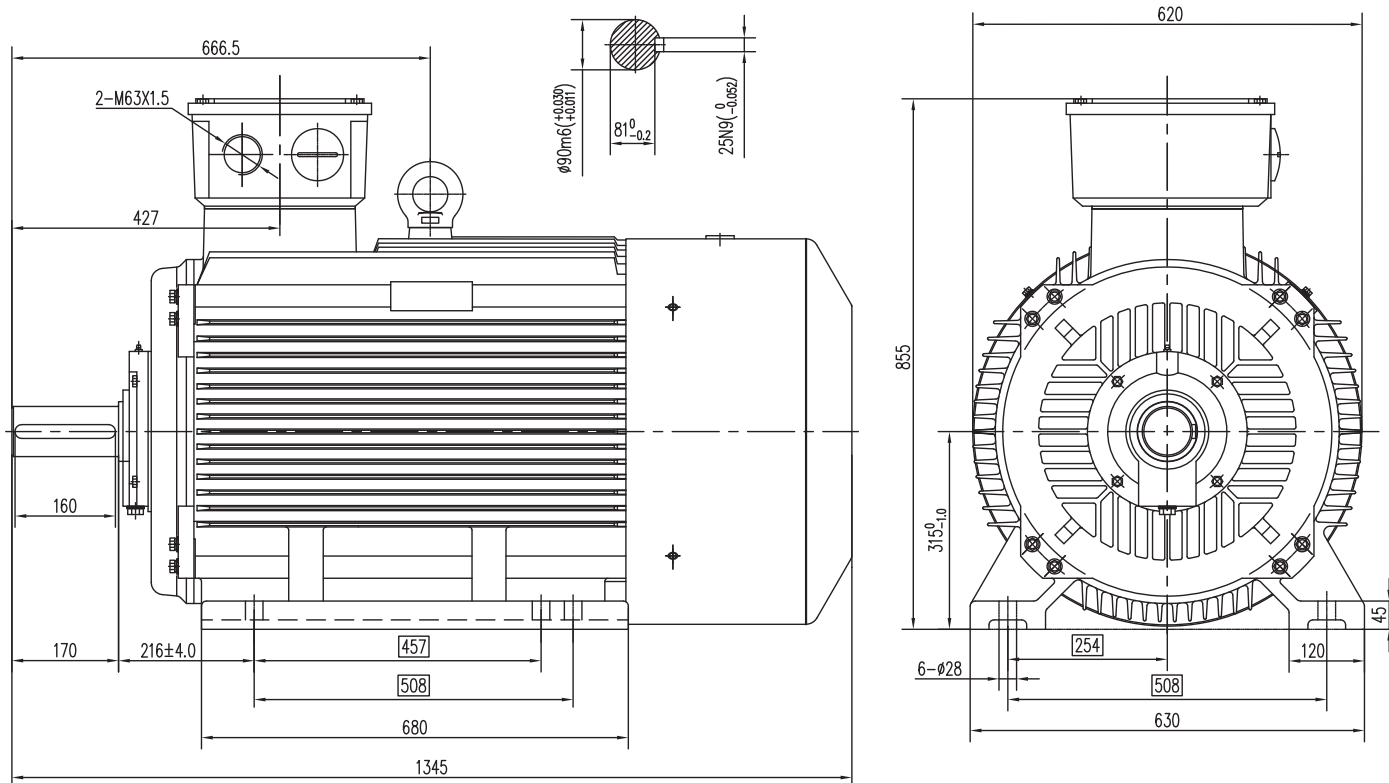

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no