


SWE280S-8 37KW 400/690V B3

Three-phase asynchronous motor in cast iron

Motor type SWE280S-8 37KW 400/690V B3
 Brand BUSCK
 Item number 93082801

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	37	50	73,6	735
690	37	50	42,3	735
460	42,55	60	73,6	882

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	93,0
Insulation class	F	Efficiency, load 75%	92,8
Cooling	IC411 (TEFC)	Efficiency, load 50%	91,2
Max. ambient temp.	40°C	Power fact, load 100%	0,78
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
Torque, Nm	481	Weight kg	520
Starting torque ratio	1,9	Sound pressure Lp dB(A)	58
Pull out torque ratio	2,2	Bearing DE	6317
Starting current ratio	6,6	Bearing NDE	6314
		Balance grade	Normal
		Inertia kgm ²	1,857
Note	IE3, Kopplingslåda med 2 x M16 + 1 x M16 2xM63 + 1xM16		
	Färg svart		

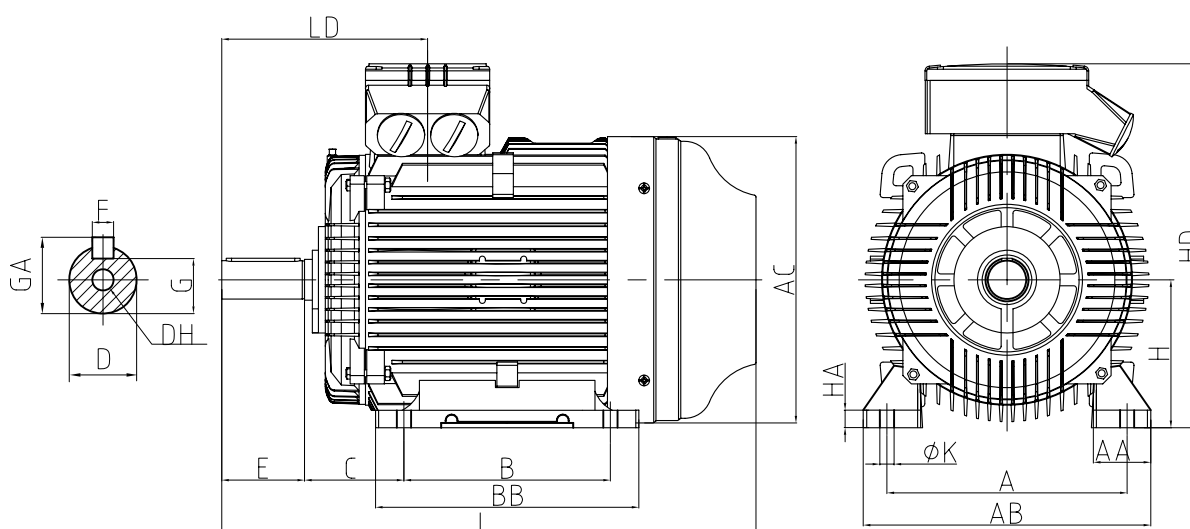

A	B	B1	C	H	D	E	F	G	DH	GA	AA	AB	AC	HA	HD	BB	LD	L
457	368		190	280	75	140	20	67.5	M20	79.5	85	542	550	35	681	490	361	968