


SWE280S-8 37,5KW 400/690V B5

Three-phase asynchronous motor in cast iron

Motor type SWE280S-8 37,5KW 400/690V B5
 Brand BUSCK
 Item number 93082802

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	37	50	73,6	735
690	37	50	42,3	735
460	42,55	60	73,6	882

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	93,0
Insulation class	F	Efficiency, load 75%	92,8
Cooling	IC411 (TEFC)	Efficiency, load 50%	91,2
Max. ambient temp.	45°C	Power fact, load 100%	0,78
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
Torque, Nm	481	Weight kg	520
Starting torque ratio	1,9	Sound pressure Lp dB(A)	58
Pull out torque ratio	2,2	Bearing DE	6317
Starting current ratio	6,6	Bearing NDE	6314
		Balance grade	Normal
		Inertia kgm ²	1,857
Note	IE3, Kopplingslåda med 2x M16 + 1 x M16	Cable entries	2xM63 + 1xM16
	Färg svart		

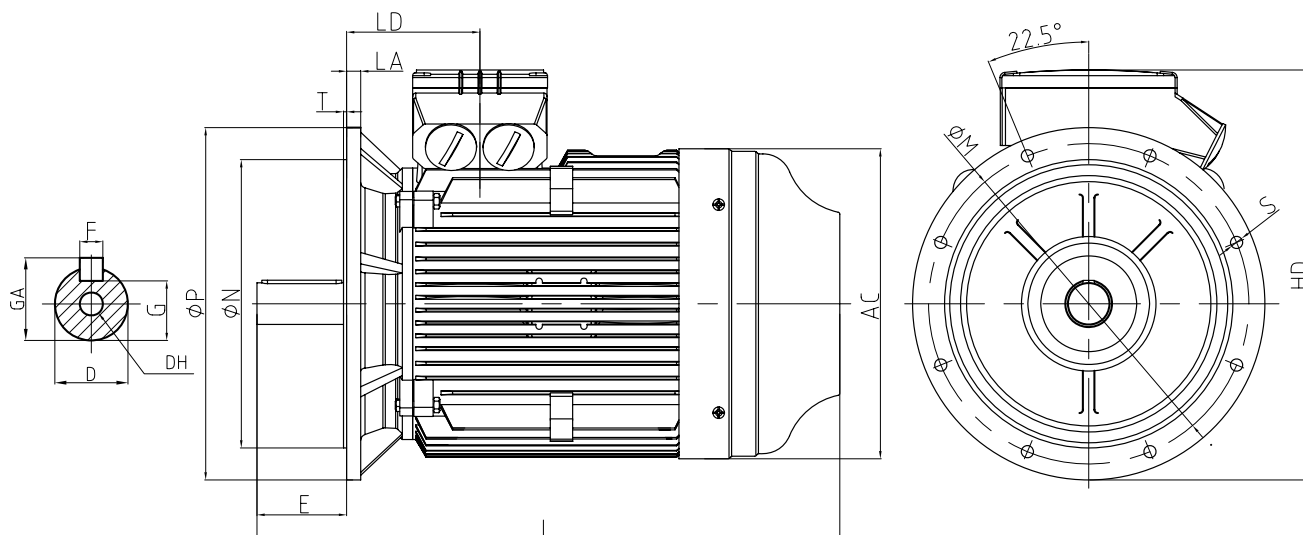

D	E	F	G	GA	DH	M	N	P	S	T	AC	HD	LA	LD	L
75	140	20	67.5	79.5	M20	500	450	550	18.5	5	550	675	22	221	968