


T3C315LB-8 110KW 400/690V B3

Three-phase asynchronous motor in cast iron

Motor type T3C315LB-8 110KW 400/690V B3
Brand BUSCK
Item number 93083181

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	110	50	211,8	740
690	110	50	121,8	740
460	126,5	60	211,8	888

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	93,7
Insulation class	F	Efficiency, load 75%	93,8
Cooling	IC411 (TEFC)	Efficiency, load 50%	93
Max. ambient temp.	40°C	Power fact, load 100%	0,80
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	1260
Torque, Nm	1419,6	Sound pressure Lp dB(A)	82
Starting torque ratio	1,8	Bearing DE	NU319 C3
Pull up torque ratio	1	Bearing NDE	6319 C3
Pull out torque ratio	2	Balance grade	Normal
Starting current ratio	6,4	Inertia kgm ²	7,813569987
		Cable entries	2xM63, 1xM16

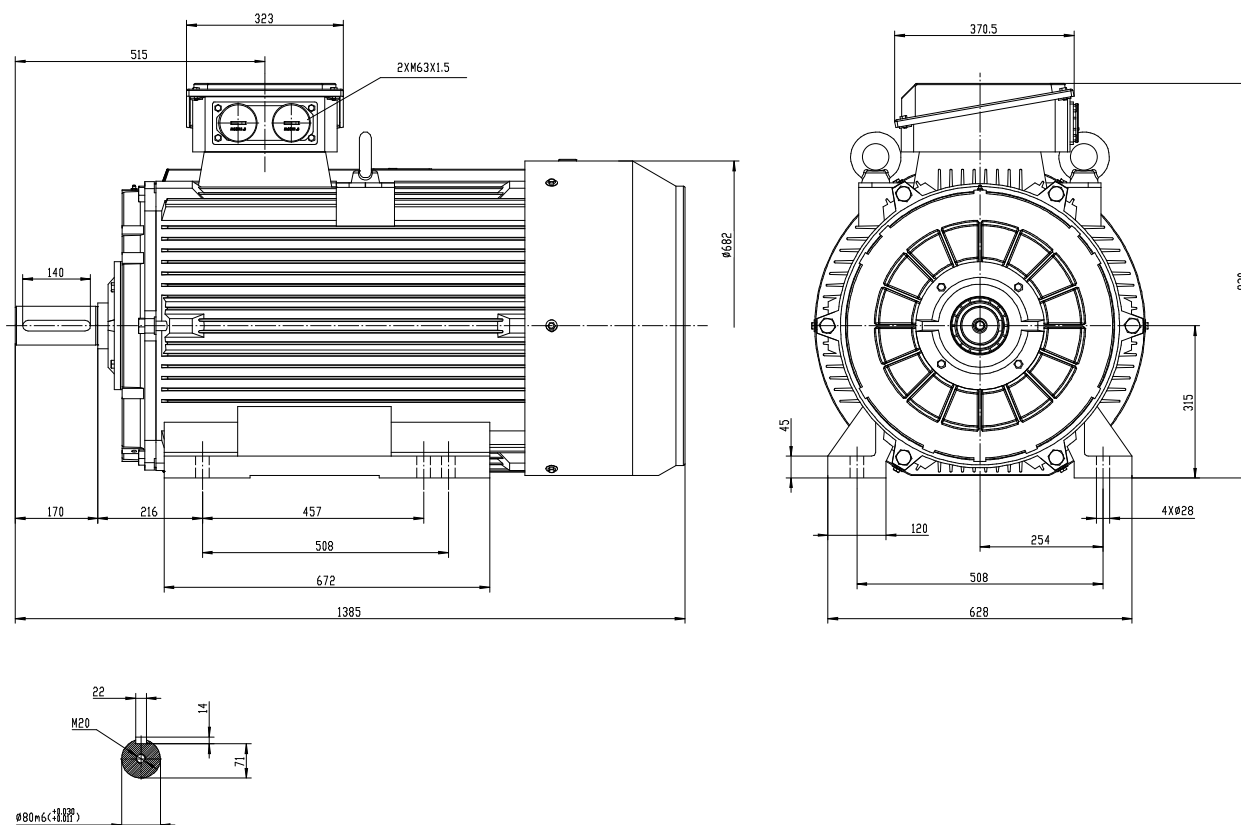

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no