

TM112M-4 4KW 230/400V B3



Three-phase asynchronous motor in aluminum

Motor type TM112M-4 4KW 230/400V B3
Brand BUSCK
Item number 93A41121UL

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	4	50		
690	4	50		
460	4,6	60		

Duty	S1	Efficiency class	IE3
Enclosure	IP55		
Insulation class	F	Painting	Standard
Cooling	IC411 (TEFC)	Color	RAL 9005
Max. ambient temp.	45°C	Weight kg	32
Min. ambient temp.	-20°C	Bearing DE	6306-2Z/C3
Max. temp. rise	80 K	Bearing NDE	6206-2Z/C3
Max altitude, masl	1000	Balance grade	Normal
		Cable entries	2xM25, 1xM16
Winding protection	Thermistors		

Note IE3 PTC
CSA C US 224693
Square terminal box

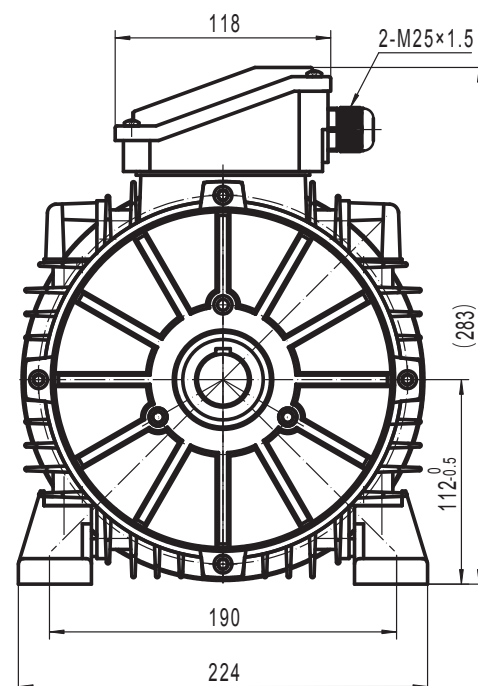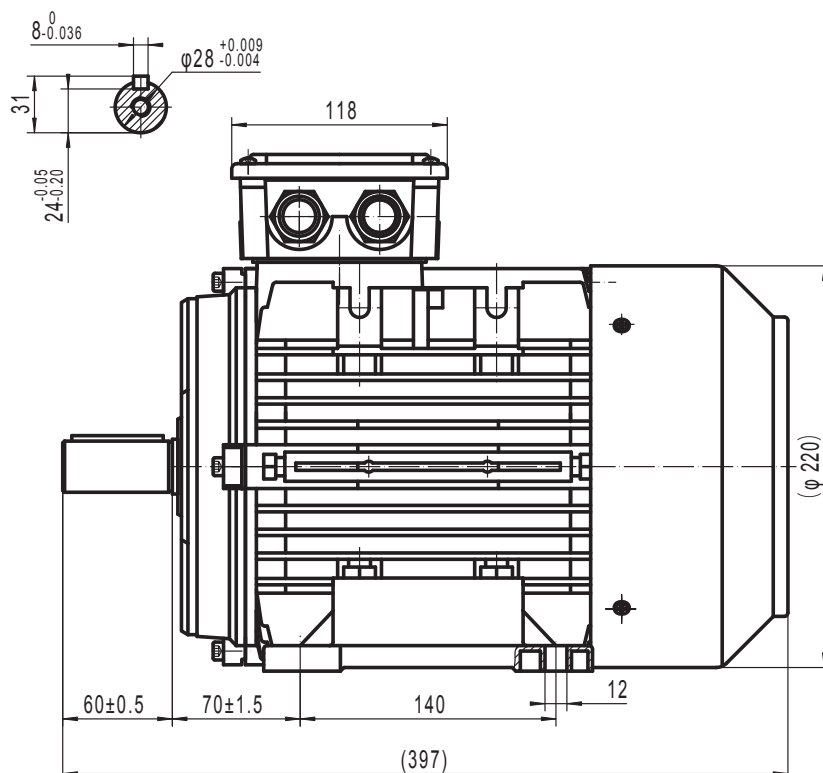

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no