

SB040 25 71B14 H18 R


Busck wormgear in aluminum

Type SB040 25 71B14 H18 R
Brand BUSCK
Item number WP042507R
Ratio 25
Painting Sandlasted. No paint
Oil 0,08 liter food approved oil Mobil SHC Cibus 320
Hollowshaft 18 mm
Weight 2,3kg
Special: Hollow shaft and outside screws in stainless steel SS316.

Gear motor data for some motors

Motor	Speed	Torque	Service factor
T2A71A-2 ,37 kW 2840 rpm	114 rpm	24 Nm	1,2
T2A71B-2 ,55 kW 2860 rpm	114 rpm	36 Nm	0,8
T2A71A-4 ,25 kW 1400 rpm	56 rpm	32 Nm	1,2
T2A71A-4 ,25 kW 1400 rpm	56 rpm	32 Nm	1,2
T2A71B-4 ,37 kW 1400 rpm	56 rpm	47 Nm	0,8
T2A71B-4 ,37 kW 1400 rpm	56 rpm	47 Nm	0,8
T2A71C-4 ,55 kW 1395 rpm	56 rpm	70 Nm	0,5
T2A71C-4 ,55 kW 1395 rpm	56 rpm	70 Nm	0,5
T2A71A-6 ,18 kW 850 rpm	34 rpm	36 Nm	1,2
T2A71B-6 ,25 kW 910 rpm	36 rpm	46 Nm	0,9
T2A71C-6 ,37 kW 890 rpm	36 rpm	70 Nm	0,6

Drawing on next page

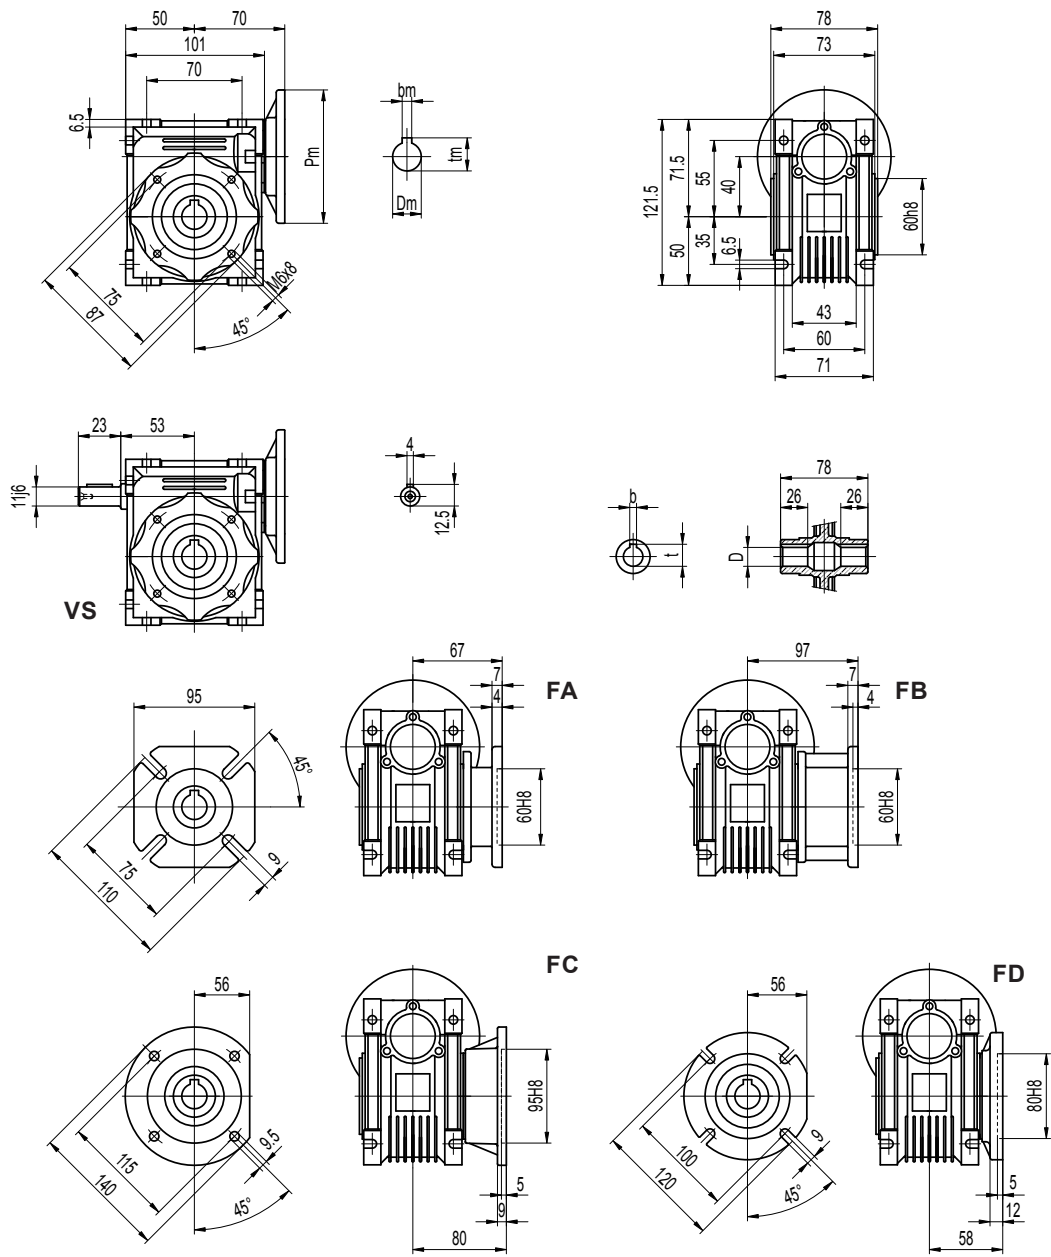

(..) Only on request
Weight: 2,3 kg

Hollow shaft		
D H8	b	t
18	6	20,8
(19)	(6)	(21,8)