

# SB075 40 80B14 H28


## Busck wormgear in aluminum

|             |                                                                    |
|-------------|--------------------------------------------------------------------|
| Type        | SB075 40 80B14 H28                                                 |
| Brand       | BUSCK                                                              |
| Item number | WP074008                                                           |
| Ratio       | 40                                                                 |
| Painting    | Powder coating. Silver RAL 9006                                    |
| Oil         | 0,55 liter full synthetic oil AGIP Telium VSF320 (Polyglycol base) |
| Hollowshaft | 28 mm                                                              |
| Weight      | 9kg                                                                |

## Gear motor data for some motors

| Motor                    | Speed  | Torque | Service factor |
|--------------------------|--------|--------|----------------|
| T3A80A-2 ,75 kW 2890 rpm | 72 rpm | 75 Nm  | 2,2            |
| T3A80B-2 1,1 kW 2900 rpm | 73 rpm | 110 Nm | 1,5            |
| T2A80A-4 ,55 kW 1420 rpm | 36 rpm | 109 Nm | 2,0            |
| T3A80B-4 ,75 kW 1440 rpm | 36 rpm | 146 Nm | 1,5            |
| T2A80A-6 ,37 kW 935 rpm  | 23 rpm | 103 Nm | 2,3            |
| T2A80B-6 ,55 kW 935 rpm  | 23 rpm | 153 Nm | 1,6            |

**Drawing on next page**

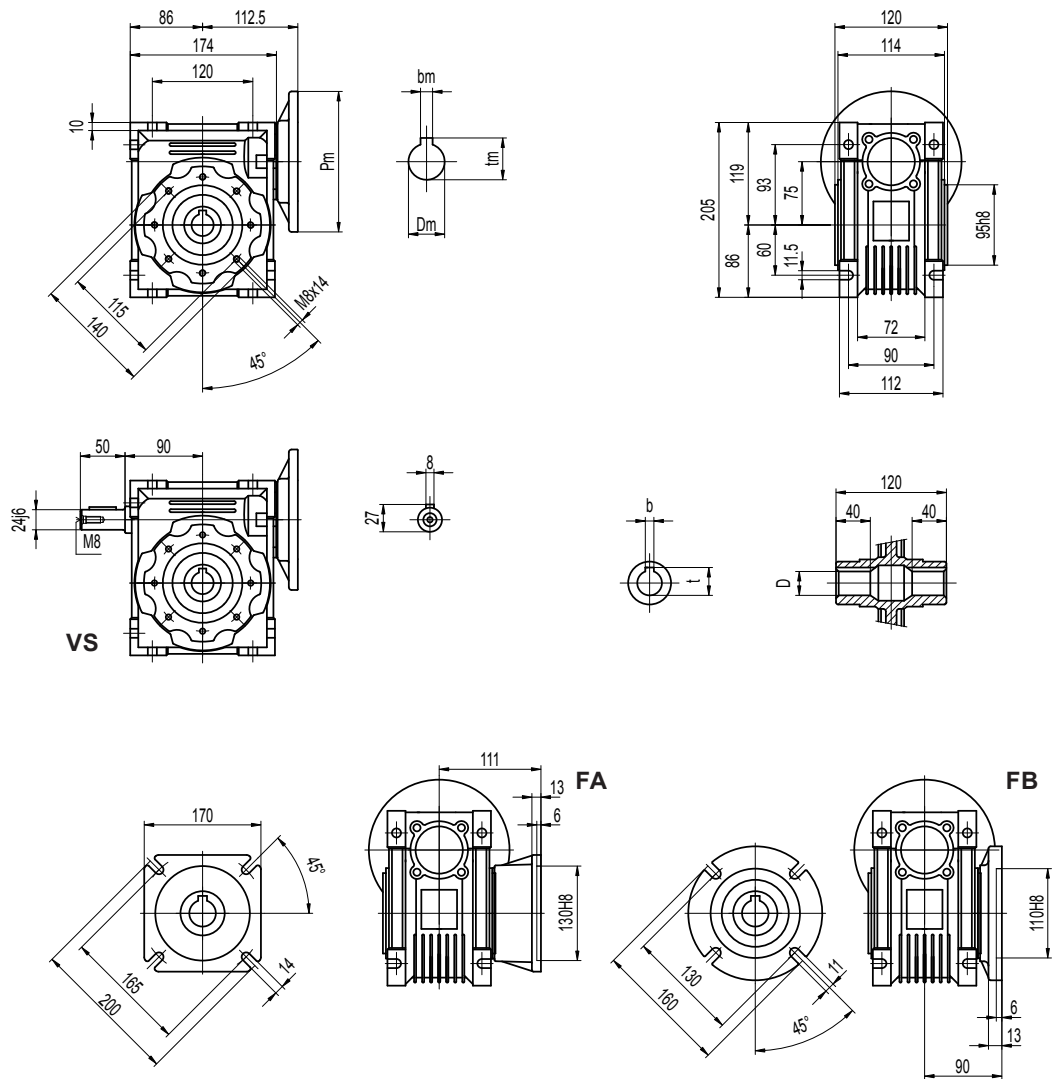

(..) Only on request  
Weight: 9 kg

| Hollow shaft |      |        |
|--------------|------|--------|
| D H8         | b    | t      |
| 28           | 8    | 31,3   |
| (35)         | (10) | (38,3) |